
Product datasheet

Specifications



To be discontinued

basic digital output kit STB - 24 V DC - 16 O

Local distributor code:

389839138 STBDDO3705KS

To be discontinued on: 1 Dec 2027

To be end-of-service on: 31 Dec 2035

EAN Code: 3595863932638

Main

Range of product	Modicon STB distributed I/O solution
Product or component type	Basic digital output kit
Kit composition	STBDDO3705 module STBXBA3000 base STBXTS1180, 18-terminal screw type connector
Product compatibility	Power distribution module STBPDT3100/3105 I/O base STBXBA3000
Range compatibility	Logic/motion controller - Modicon M262 Modicon M580 Third party
Device application	Industrial application
Discrete output number	16
Discrete output logic	Positive logic (source)
Discrete output voltage	24 V DC for solid state

Complementary

Discrete output number	16 solid state at 24 V DC
Discrete output current	500 mA
Response time on output	< 10 ms off to on < 10 ms on to off
Maximum leakage current	0.4 mA 30 V DC at state 0
Typical current consumption	135 mA at 5 V DC
Electrical connection	Screw terminal
Height	13.9 mm
Width	128.3 mm
Depth	70 mm
Net weight	0.086 kg

Environment

IP degree of protection	IP20
Marking	CE
Product certifications	UL CSA FM Class 1 Division 2
Standards	IEC 61131-2

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Relative humidity	95 % at 60 °C without condensation
Operating altitude	<= 2000 m
Pollution degree	2
Shock resistance	30 gn for 11 ms conforming to IEC 88 reference 2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.622 cm
Package 1 Width	7.947 cm
Package 1 Length	13.052 cm
Package 1 Weight	210.0 g
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.77 kg
Unit Type of Package 3	P06
Number of Units in Package 3	320
Package 3 Height	75.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	86 kg

Logistical informations

Country of origin	ID

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**42 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**11 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**31 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.1 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**No**
Packaging without single use plastic	**Yes**
SCIP Number	**6830dd70-e4bc-47df-85c7-e41f888576f4**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold


Use Again

Repack and remanufacture

End of life manual availability	End of Life Information
Take-back	**No**

Dimensions Drawings

Dimensions

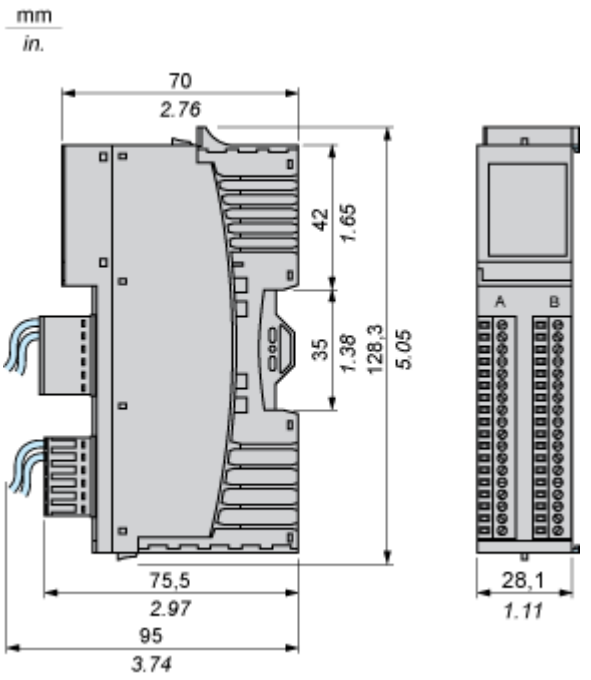


Connections and Schema

Wiring Diagram

Example

16 two-wire actuators

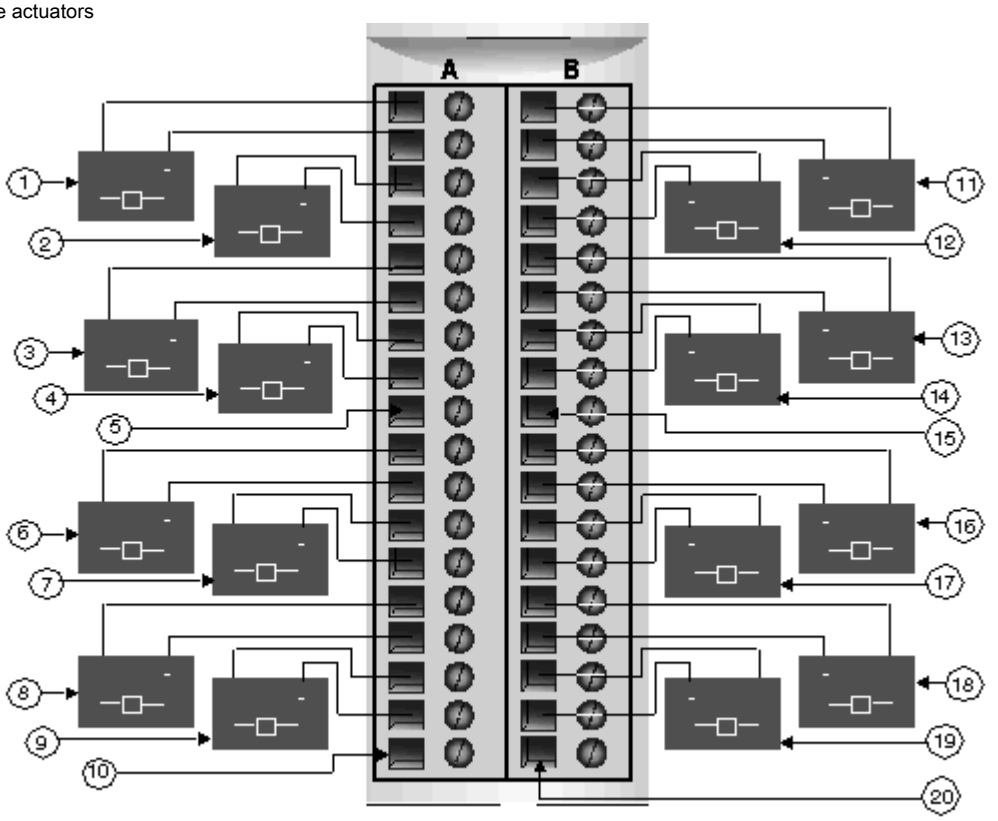

#	Group 1	#	Group 2
1	Channel 1, Connector A, Actuator	11	Channel 1, Connector B, Actuator
2	Channel 2, Connector A, Actuator	12	Channel 2, Connector B, Actuator
3	Channel 3, Connector A, Actuator	13	Channel 3, Connector B, Actuator
4	Channel 4, Connector A, Actuator	14	Channel 4, Connector B, Actuator
5	Pin 9, Connector A (not used)	15	Pin 9, Connector B (not used)
6	Channel 5, Connector A, Actuator	16	Channel 5, Connector B, Actuator
7	Channel 6, Connector A, Actuator	17	Channel 6, Connector B, Actuator
8	Channel 7, Connector A, Actuator	18	Channel 7, Connector B, Actuator
9	Channel 8, Connector A, Actuator	19	Channel 8, Connector B, Actuator
10	Pin 18, Connector A (not used)	20	Pin 18, Connector B (not used)