
Product data sheet
Characteristics

VW3A7732
braking resistor, Altivar, 28Ohms, 0.3kW, IP20

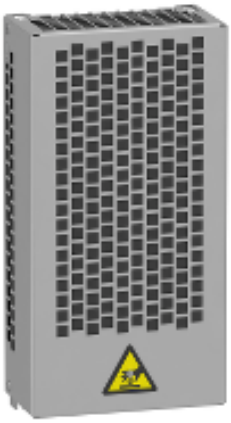

Main

Range of product	Altivar
Range compatibility	Altivar Machine ATV340 Easy Altivar 310 Altivar Process ATV900 Altivar Machine ATV320 Easy Altivar 310L
Product or component type	Braking resistor
Ohmic value	28 Ohm

Complementary

Product compatibility	Variable speed drive ATV320 15 kW 525...600 V Variable speed drive ATV930 wall mount 4 kW 200...240 V medium cycle Variable speed drive ATV950 wall mount 11 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 3 kW 200...240 V medium cycle Variable speed drive ATV930 wall mount 11 kW 380...480 V light cycle Variable speed drive ATV320 7.5 kW 525...600 V Variable speed drive ATV930 15 kW 500...690 V light cycle Variable speed drive ATV930 wall mount 3 kW 200...240 V light cycle Variable speed drive ATV930 25 hp 600 V light cycle Variable speed drive ATV320 7.5 kW 380...480 V Variable speed drive ATV320 3 kW 200...240 V Variable speed drive ATV320 11 kW 380...480 V Variable speed drive ATV320 11 kW 525...600 V Variable speed drive ATV930 20 hp 600 V light cycle Variable speed drive ATV930 18.5 kW 500...690 V light cycle Variable speed drive ATV930 wall mount 15 kW 380...480 V light cycle Variable speed drive ATV340 11 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 15 kW 380...480 V light cycle Variable speed drive ATV310 11 kW Variable speed drive ATV930 wall mount 4 kW 200...240 V light cycle Variable speed drive ATV340 7.5 kW 380...480 V light cycle Variable speed drive ATV320 2.2 kW 200...240 V
Duty cycle	Light cycle (heavy duty) <0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) <0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle
Average power available	0.3 KW at 50 °C
Electrical connection	Terminal, connection capacity: <= 10 mm² / 8 AWG for drive
Protection type	Thermal protection via drive
Width	175 Mm
Height	345 Mm
Depth	100 Mm
Net weight	2.7 Kg

Environment

IP degree of protection	IP20
Ambient air temperature for storage	-25…70 °C
Ambient air temperature for operation	0…50 °C
Product certifications	UL[RETURN]CE[RETURN]EAC[RETURN]UKCA[RETURN]RoHS

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	17.500 Cm
Package 1 Width	19.000 Cm
Package 1 Length	36.000 Cm
Package 1 Weight	3.094 Kg
Unit Type of Package 2	P06
Number of Units in Package 2	18
Package 2 Height	75.000 Cm
Package 2 Width	60.000 Cm
Package 2 Length	80.000 Cm
Package 2 Weight	63.364 Kg

Offer Sustainability

Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	No
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which
Take-back	No

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised