
Product data sheet
Characteristics

170DNT11000
Communication adaptor, Modicon Momentum automation platform, Profibus DP, 9.6 to 12Mbit/s, twisted pair cable

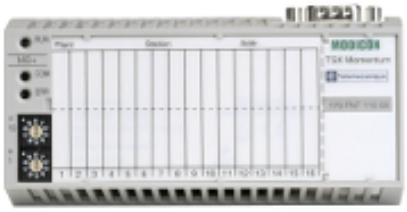

Commercial status
End of Commercialisation :

⚠ End of Commercialisation

Main

Range of product	Modicon Momentum automation platform
Product or component type	Profibus DP communication adaptor
Method of access	Master/Slave

Complementary

Communication port protocol	Profibus DP
Addressing	Switch selectable
Fail state	Fail safe
Transmission support medium	Twisted pair
Transmission rate	9.6...12 Mbit/s
Topology	Ring Multidrop
Control parameter	CRC-16
Net weight	0.07 Kg

Environment

IP degree of protection	IP20
Protective treatment	TC
Marking	CE

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 Cm
Package 1 Width	17.9 Cm
Package 1 Length	25.9 Cm
Package 1 Weight	188.0 G

Offer Sustainability

Mercury free	Yes
Sustainable packaging	No
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, w

Contractual warranty

Warranty (in months)	18

Product Life Status : Post commercialisation

170DNT11000 may be replaced by any of the following products:



170ENT11001

Modicon Momentum - Ethernet communication adaptor - 10/100 Mbit/s

Qty 1

Substitution date: |



170ENT11002

Modicon Momentum - Ethernet communication adaptor - 10 Mbit/s

Qty 1

Substitution date: |