
Product data sheet
Characteristics

8910DPA24V02
Contactor, Definite Purpose, 25A, 4 pole, 20 HP at 575 VAC, 3 phase, 110/120 VAC 50/60 Hz coil, open

Local Stock Code: Not on Stock

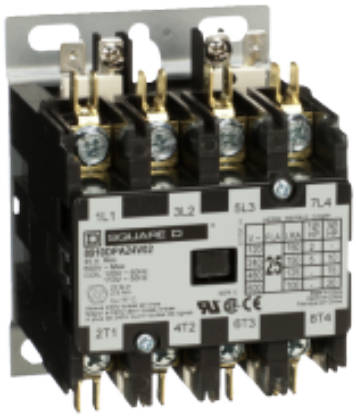

Commercial status
End of Commercialisation : SEPT 15, 2023

⚠ End of Commercialisation

Main

Product or component type	Definite Purpose Contactor
[In] rated current	25 A
Poles description	4P
Pole contact composition	4 NO
Range of product	DPA

Complementary

Motor power hp	2 Hp at 115 V AC, 1 phase 5 Hp at 230 V AC, 1 phase 10 Hp at 230 V AC, 3 phases 15 Hp at 460 V AC, 3 phases 20 Hp at 575 V AC, 3 phases
Locked rotor rated current	125 A at 460 V AC 100 A at 575 V AC 150 A at 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	120 V AC at 60 Hz 110 V AC at 50 Hz
Network number of phases	3 phases
Electrical connection	Binder head Quick connect terminals

Environment

Product certifications	UL recognized[RETURN]CSA

Ordering and shipping details

Category	US1CTR221255
Discount Schedule	CTR2
GTIN	785901080084
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.128 Cm
Package 1 Width	9.906 Cm
Package 1 Length	7.366 Cm
Package 1 Weight	562.455 G

Offer Sustainability

Mercury free	Yes
Sustainable packaging	No
EU RoHS Directive	Compliant By Exemption

Contractual warranty

Warranty (in months)	18

Product Life Status : End of commerc. - Block

8910DPA24V02 may be replaced by any of the following products:



8910DPA34V02

Contactor, Definite Purpose, 30A, 4 pole, 20HP at 575VAC, 3 phase, 110/120VAC 50/60Hz coil, open

Qty 1

Substitution date: |