
Product data sheet
Characteristics

GV2G345
Linergy FT, Comb busbar, 63A, 3 tap-offs, 45mm pitch

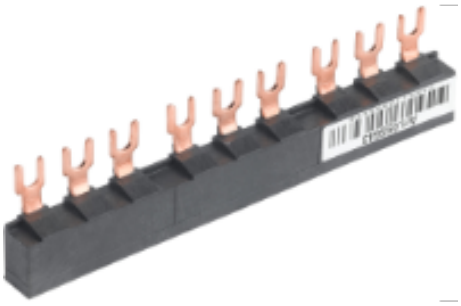

Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or component type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys GV2 TeSys K TeSys U TeSys Deca
Fixing mode	Terminals:
Number of tap-offs	3
[Ith] conventional free air thermal current	63 A

Complementary

Product certifications	CE[RETURN]cULus
[Ui] rated insulation voltage	690 V
Connection pitch	45 Mm
Width	134 Mm
Net weight	0.058 Kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.000 Cm
Package 1 Width	3.500 Cm
Package 1 Length	13.500 Cm
Package 1 Weight	58.000 G
Unit Type of Package 2	S01
Number of Units in Package 2	80
Package 2 Height	15.000 Cm
Package 2 Width	15.000 Cm
Package 2 Length	40.000 Cm
Package 2 Weight	4.833 Kg
Unit Type of Package 3	P06
Number of Units in Package 3	2560
Package 3 Height	75.000 Cm

Package 3 Width	60.000 Cm
Package 3 Length	80.000 Cm
Package 3 Weight	164.180 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	No
Environmental Disclosure	Product Environmental Profile
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead, which is known to the State
POP Directive	No POPs
End of life manual availability	End Of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised