
Product data sheet
Characteristics

KSA400FA4
Jointing unit adapter, Canalis KSA 400A, aluminium, 3L+N+PE, adapter from former KS offer to current KS offer

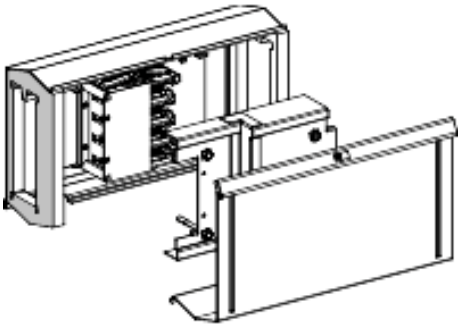

Main

Range of product	Canalis
Product name	KS
Product or component type	Adapter
Product compatibility	KS
[Ie] rated operational current	400 A
Colour	White (RAL 9001)

Complementary

Accessory / separate part category	Adaptation
Device application	Adapt old offer
Mounting location	Between trunking
Mounting mode	By screws
Mounting support	Busbar
Busbar trunking polarity	3L + N + PE
Width	324 Mm
Depth	95 Mm
Height	188.5 Mm
Body material	Plastic
Net weight	2.9 Kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
Standards	IEC 61439-6 IEC 60439-2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.600 Cm
Package 1 Width	19.000 Cm
Package 1 Length	32.400 Cm
Package 1 Weight	4.650 Kg
Unit Type of Package 2	PAL
Number of Units in Package 2	20
Package 2 Height	75.000 Cm

Package 2 Width	62.000 Cm
Package 2 Length	92.000 Cm
Package 2 Weight	138.000 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	Yes
Environmental Disclosure	Product Environmental Profile
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
Halogen-free status	Halogen free product
PVC free	Yes
Silicone-free	Yes
End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised