
Product data sheet
Characteristics

KSB1000ZB2
Sprinkler proofing kit, Canalis KSA 500A to 1000A, aluminium, IP55, white RAL9001

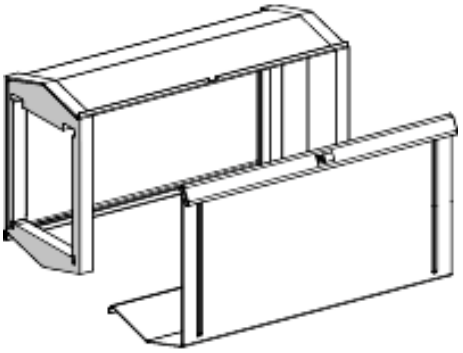

Main

Range of product	Canalis
Product name	KS
Product or component type	Sprinkler proofing device
Product compatibility	KS
[Ie] rated operational current	1000 A 500 A 800 A 630 A
Offer type	Spare part
Colour	White (RAL 9001)

Complementary

Device application	Medium power distribution
[Ue] rated operational voltage	230...690 V
Control type	Without
Number of circuits	1
Width	324 Mm
Depth	132 Mm
Height	200 Mm
Net weight	1 Kg

Environment

IK degree of protection	IK08 conforming to IEC 62262
IP degree of protection	IP55 conforming to IEC 60529
Standards	IEC 60439-2 IEC 61439-6

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.500 Cm
Package 1 Width	23.200 Cm
Package 1 Length	33.000 Cm
Package 1 Weight	2.600 Kg
Unit Type of Package 2	PAL
Number of Units in Package 2	3
Package 2 Height	85.000 Cm

Package 2 Width	92.000 Cm
Package 2 Length	62.000 Cm
Package 2 Weight	81.200 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	Yes
Environmental Disclosure	Product Environmental Profile
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
Halogen-free status	Halogen free product
PVC free	Yes
Silicone-free	Yes
End of life manual availability	No need of specific recycling operations
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised