
Product data sheet
Characteristics

LA9G82
Terminal block,TeSys Giga electronic overload relay,for LR9G,push-in terminals

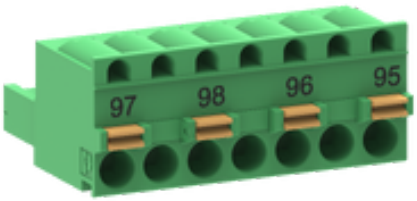

Main

Range	TeSys
Device short name	LA9G
Product or component type	Connector
Device application	Control circuit
Range compatibility	TeSys G
Quantity per set	Set of 1

Complementary

Rated voltage	600 V AC 50/60 Hz UL 600 V AC 50/60 Hz IEC
[Ie] rated operational current	10 A
Pin number	4
Dielectric test voltage	3000 KV, 1 minute AC
Overvoltage category	III
Connections - terminals	Control circuit: push-in 1 cable(s) 0.2…2.5 mm² solid stranded without cable end Control circuit: push-in 1 cable(s) 0.25…2.5 mm² flexible with cable end Control circuit: push-in 2 cable(s) 0.5…1.0 mm² with cable end
Net weight	0.05 Kg
Height	15 Mm
Width	26 Mm
Depth	36 Mm

Environment

IP degree of protection	IP20 conforming to IEC 60529
Pollution degree	3 conforming to IEC 60947-1
Standards	EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1 GB/T 14048.5
Ambient air temperature for operation	-25…60 °C
Ambient air temperature for storage	-60…80 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.0 Cm
Package 1 Width	5.5 Cm
Package 1 Length	8.0 Cm

Package 1 Weight	15.0 G
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15.0 Cm
Package 2 Width	30.0 Cm
Package 2 Length	40.0 Cm
Package 2 Weight	566.0 G

Offer Sustainability

Mercury free	Yes
Sustainable packaging	No
Environmental Disclosure	Product Environmental Profile
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	958748fb-37b2-4e37-985e-0763521c22ab
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known
Halogen-free status	Halogen free plastic parts product
PVC free	Yes
End of life manual availability	End Of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised