
Product data sheet
Characteristics

LV429287
carriage switches, drawout ComPact NSX, chassis connected (CE)/disconnected (CD) position, 2 changeover contact types

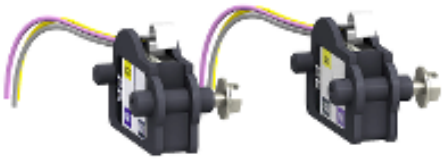

Main

Device short name	CE[RETURN]CD
Product or component type	Carriage switch
Device application	Monitoring
Range compatibility	ComPact ComPact NSX100 ComPact ComPact NSX160 ComPact ComPact NSX250 ComPact ComPact NSX400 ComPact ComPact NSX630
Signal contacts composition	2 NO/NC

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	CE/CD
Mounting mode	Drawout
[Ith] conventional free air thermal current	6 A
[Ie] rated operational current	AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.6 A at 110 V DC DC-12: 2.5 A at 48 V DC DC-12: 6 A at 24 V DC DC-14: 0.03 A at 250 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.2 A at 48 V DC DC-14: 1 A at 24 V DC
Minimum load	100 MA at 24 V DC
Quantity per set	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.900 Cm
Package 1 Width	6.100 Cm
Package 1 Length	8.000 Cm
Package 1 Weight	53.000 G
Unit Type of Package 2	S03
Number of Units in Package 2	45
Package 2 Height	30 Cm
Package 2 Width	30 Cm
Package 2 Length	40 Cm
Package 2 Weight	2.830 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	No
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the Stat
Halogen-free status	Product contains halogen above thresholds
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised