
Product data sheet
Characteristics

LV833036SP
XF or MX voltage release, MasterPact MTZ1/2/3, diagnostics and communicating, 200/250VAC 50/60Hz, 200/250VDC, spare part

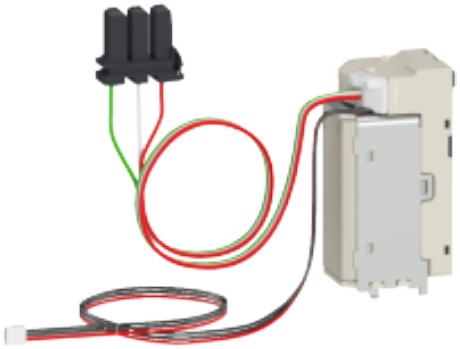

Main

Range	MasterPact
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MasterPact MTZ1 circuit-breaker Masterpact MasterPact MTZ2 circuit-breaker Masterpact MasterPact MTZ3 circuit-breaker
Voltage release type	Closing coil Opening coil

Complementary

Control type	Communicating
Signalling function	Error Coil powered Electrical push-button activated Ready to close or open
[Uc] control circuit voltage	200/250 V AC 50/60 Hz 200/250 V DC
Threshold tripping voltage	0.7...1.1 Un on opening 0.85...1.1 Un on closing
Supply holding power	4.5 W
Mounting mode	Fixed/Drawout
Operating time	60 ms on opening for MasterPact MTZ1 60 ms on opening for MasterPact MTZ2 60 ms on opening for MasterPact MTZ3 65 ms on closing for MasterPact MTZ1 80 ms on closing for MasterPact MTZ2 90 ms on closing for MasterPact MTZ3
Provided equipment	1 instruction sheet
Offer type	Spare part

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 Cm
Package 1 Width	6.0 Cm
Package 1 Length	8.0 Cm
Package 1 Weight	242.0 G
Unit Type of Package 2	S03
Number of Units in Package 2	12

Package 2 Height	30.0 Cm
Package 2 Width	30.0 Cm
Package 2 Length	40.0 Cm
Package 2 Weight	3.192 Kg

Offer Sustainability

Recyclability potential, in %	74
Total lifecycle Carbon footprint	5 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	4.364567701863354
Carbon footprint of the manufacturing phase [A1 to A3]	4 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.03164488198757764
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.05395998757763975
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.000035545
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Mercury free	Yes
Sustainable packaging	Yes
Carbon footprint of the end-of-life phase [C1 to C4]	0.4435965217391304
Carbon footprint of the end-of-life phase [C1 to C4]	0.4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Total lifecycle Carbon footprint	5
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	Fb7b4f31-e2d2-4b8c-a9f0-9a1e2c43da19
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which
Halogen-free status	Product contains halogen above thresholds
PVC free	Yes
Silicone-free	No
End of life manual availability	End Of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised