
Product data sheet
Characteristics

LV848198
ON/OFF (OF) indication contact block, MasterPact MTZ2/MTZ3 fixed, 1 block of 4 changeover contacts, standard, 6A/240VAC

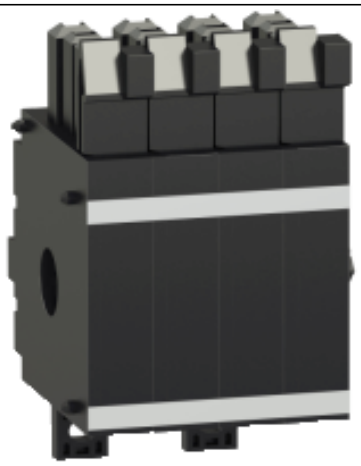

Main

Range	MasterPacT
Device short name	4 OF
Product or component type	Auxiliary contact block
Device application	Control
Range compatibility	MasterPact MasterPact MTZ2 MasterPact MasterPact MTZ3

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	4 NO/NC
Mounting mode	Fixed
[Ie] rated operational current	AC-12: 10 A at 240/380 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 10 A at 480 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 6 A at 690 V AC 50/60 Hz conforming to EN/IEC 60947-2 DC-12: 10 A at 24/48 V DC conforming to EN/IEC 60947-2 DC-12: 10 A at 125 V DC conforming to EN/IEC 60947-2 DC-12: 3 A at 250 V DC conforming to EN/IEC 60947-2 8 A at 480 V AC 50/60 Hz conforming to UL 489 6 A at 600 V AC 50/60 Hz conforming to UL 489 6 A at 250 V DC conforming to UL 489
Minimum load	2 MA at 15 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.0 Cm
Package 1 Width	7.0 Cm
Package 1 Length	4.0 Cm
Package 1 Weight	1.042 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	Yes
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes

REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the Stat
Halogen-free status	Halogen free plastic parts product
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised