
Product data sheet
Characteristics

LV848468
ON/OFF (OF) indication contact block, MasterPact MTZ2/3 drawout, 1 block of 4 changeover contacts, standard, 6A/240VAC

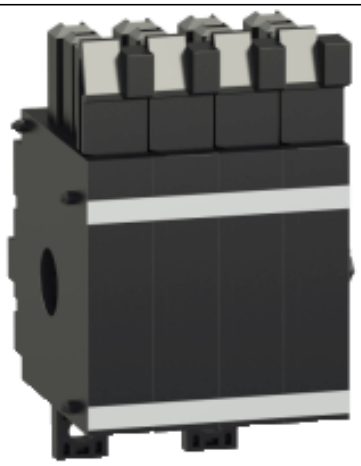

Main

Range	MasterPacT
Device short name	4 OF
Product or component type	Auxiliary contact block
Device application	Control
Range compatibility	MasterPact MasterPact MTZ2 MasterPact MasterPact MTZ3

Complementary

Auxiliary contacts type	Standard
Signal contacts composition	4 NO/NC
Mounting mode	Drawout
[Ie] rated operational current	AC-12: 10 A at 240/380 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 10 A at 480 V AC 50/60 Hz conforming to EN/IEC 60947-2 AC-12: 6 A at 690 V AC 50/60 Hz conforming to EN/IEC 60947-2 DC-12: 10 A at 24/48 V DC conforming to EN/IEC 60947-2 DC-12: 10 A at 125 V DC conforming to EN/IEC 60947-2 DC-12: 3 A at 250 V DC conforming to EN/IEC 60947-2 8 A at 480 V AC 50/60 Hz conforming to UL 489 6 A at 600 V AC 50/60 Hz conforming to UL 489 6 A at 250 V DC conforming to UL 489
Minimum load	2 MA at 15 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.0 Cm
Package 1 Width	7.0 Cm
Package 1 Length	4.0 Cm
Package 1 Weight	1.066 Kg

Offer Sustainability

REACh free of SVHC	Yes
Mercury free	Yes
Sustainable packaging	Yes
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
REACh Regulation	Free of Substances of Very High Concern above the threshold

EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the Stat
Halogen-free status	Halogen free plastic parts product
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised