
Product data sheet
Characteristics

LV848477
EF combined connected/closed contact, MasterPact MTZ2/MTZ3 drawout, 1 changeover contact, standard 6A/240VAC

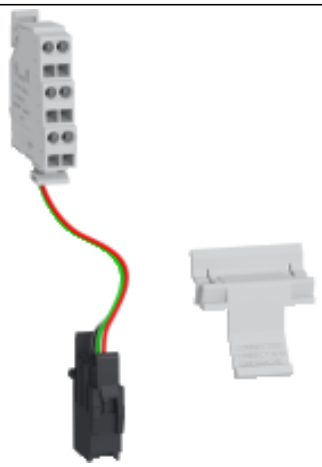

Main

Range	MasterPact
Device short name	EF
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	Masterpact MasterPact MTZ2 circuit breaker Masterpact MasterPact MTZ3 circuit breaker
Signal contacts composition	1 NO/NC
Mounting mode	Drawout

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Connected position
[Ie] rated operational current	AC-12: 6 A at 690 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.8 A at 125 V DC DC-12: 2.5 A at 24/48 V DC AC-12: 6 A at 240/380 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz
Minimum load	100 MA at 24 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.0 Cm
Package 1 Width	15.0 Cm
Package 1 Length	5.0 Cm
Package 1 Weight	37.0 G
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	5.0 Cm
Package 2 Width	10.0 Cm
Package 2 Length	24.0 Cm
Package 2 Weight	377.0 G
Unit Type of Package 3	S03
Number of Units in Package 3	100
Package 3 Height	30.0 Cm
Package 3 Width	30.0 Cm

Package 3 Length	40.0 Cm
Package 3 Weight	4.257 Kg

Offer Sustainability

REACh free of SVHC	Yes
Mercury free	Yes
Sustainable packaging	Yes
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the Stat
Halogen-free status	Product contains halogen above thresholds
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised