
Product data sheet
Characteristics

LV848496
MX opening voltage release, MasterPact MTZ2/MTZ3 drawout, standard, 380/480VAC 50/60Hz

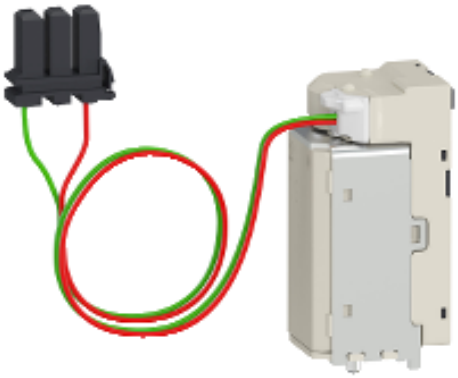

Main

Range	MasterPact
Device short name	MX
Product or component type	Voltage release
Device application	Control
Range compatibility	Masterpact MasterPact MTZ2 circuit-breaker Masterpact MasterPact MTZ3 circuit-breaker
Voltage release type	Opening coil

Complementary

Control type	Standard
[Uc] control circuit voltage	380...480 V AC 50/60 Hz
Threshold tripping voltage	0.7...1.1 Un on opening
Supply holding power	4.5 VA
Mounting mode	Drawout
Operating time	60 ms on opening for MasterPact MTZ2 60 ms on opening for MasterPact MTZ3

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.5 Cm
Package 1 Width	6.1 Cm
Package 1 Length	8.3 Cm
Package 1 Weight	1.164 Kg

Offer Sustainability

Recyclability potential, in %	74
Total lifecycle Carbon footprint	24 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	20.9932099378882
Carbon footprint of the manufacturing phase [A1 to A3]	21 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.15220926708074534
Carbon footprint of the distribution phase [A4]	0.2 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.2595430807453416
Carbon footprint of the installation phase [A5]	0.3 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0.000035545
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.

Mercury free	Yes
Sustainable packaging	Yes
Carbon footprint of the end-of-life phase [C1 to C4]	2.1336626086956523
Carbon footprint of the end-of-life phase [C1 to C4]	2 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Total lifecycle Carbon footprint	24
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	Fb7b4f31-e2d2-4b8c-a9f0-9a1e2c43da19
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which
Halogen-free status	Product contains halogen above thresholds
PVC free	Yes
Silicone-free	No
End of life manual availability	End Of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised