
Product data sheet
Characteristics

LVS03031
Mounting plate, PrismaSeT G, for NSX/CVS/ Vigi 250A, horizontal fixed, rotary handle, 5M, W600mm

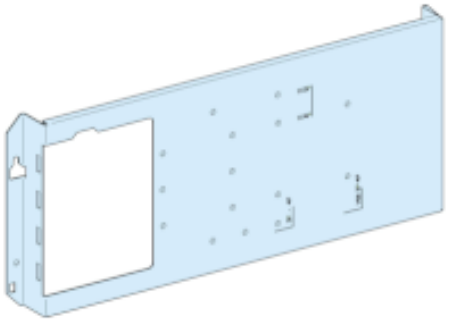

Main

Range	PrismaSeT
Range of product	PrismaSeT G
Product or component type	Mounting plate
Accessory / separate part category	Installation accessory
Range compatibility	PrismaSeT PrismaSeT G enclosure
Enclosure/cubicle description	Floor-standing enclosure - width 600 mm Wall-mounted enclosure - width 600 mm Floor-standing enclosure - width 850 mm Floor-standing enclosure + duct - width 600 + 300 mm Wall-mounted enclosure + duct - width 600 + 300 mm
Installed device	EasyPact: fixed CVS100...160 without earth leakage protection - control: direct front rotary handle EasyPact: fixed CVS250 without earth leakage protection - control: direct front rotary handle - hori ComPact: fixed NSX100...160 without earth leakage protection - control: direct front rotary handle ComPact: fixed NSX250 without earth leakage protection - control: direct front rotary handle - hori EasyPact: fixed CVS100...160 with earth leakage protection - control: direct front rotary handle - h EasyPact: fixed CVS250 with earth leakage protection - control: direct front rotary handle - horizor ComPact: fixed NSX100...160 with earth leakage protection - control: direct front rotary handle - h ComPact: fixed NSX250 with earth leakage protection - control: direct front rotary handle - horizor
Poles description	1 x 3P: fixed CVS100...160 horizontal installation 1 x 4P: fixed CVS100...160 horizontal installation 1 x 3P: fixed CVS250 horizontal installation 1 x 4P: fixed CVS250 horizontal installation 1 x 3P: fixed NSX100...160 horizontal installation 1 x 4P: fixed NSX100...160 horizontal installation 1 x 3P: fixed NSX250 horizontal installation 1 x 4P: fixed NSX250 horizontal installation
Condition of use	Need additional plate (2M high) when installation of device is in horizontal
Number of vertical modules [50 mm]	5 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 600 5 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 60 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 60 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 60 4 module(s): CVS100...160 without earth leakage protection , direct with long terminal shield in 85 5 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm 5 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 mm 4 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 + 3 4 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 600 + 3 4 module(s): CVS250 without earth leakage protection , direct with long terminal shield in 850 mm 4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 60 4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 60 5 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 60 5 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 60 4 module(s): NSX100...160 without earth leakage protection , direct with long terminal shield in 85 4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 3 4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 + 3 5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm 5 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 600 mm 4 module(s): NSX250 without earth leakage protection , direct with long terminal shield in 850 mm 5 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 m 5 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 m 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 4 module(s): CVS100...160 with earth leakage protection , direct with long terminal shield in 600 + 5 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm W 5 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 mm W 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 m 4 module(s): CVS250 with earth leakage protection , direct with long terminal shield in 600 + 300 m 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 + 5 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 m 5 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 600 m 4 module(s): NSX100...160 with earth leakage protection , direct with long terminal shield in 850 m 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 m 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 + 300 m 5 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm W 5 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 600 mm W 4 module(s): NSX250 with earth leakage protection , direct with long terminal shield in 850 mm W
Standards	IEC 61439-2
Product certifications	ASTA

Complementary

Cable entry	Cut-out plates 0.33 mm top 92 mm Cut-out plates 0.31 mm top 42 mm Cut-out plates 0.31 mm bottom 42 mm
Material	Sheet steel
Protective treatment	Electrophoresis treatment and hot-polymerised polyester epoxy powder
Surface finish	Matt Textured
Colour	White (RAL 9003)
Width	600 Mm
Height	150 Mm

Net weight	1.08 Kg
Enclosure/cubicle width	600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed direct front r 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 without fixe 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 without fixe 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed direct front r 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed direct front r 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 without fixe 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 without fixe 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 without fixed direct front r 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 without fixed direct front r 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 without fixed direct front rotary 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 without fixed direc 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 without fixed direc 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 without fixed direct front rotary 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 without fixed direct front rotary 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 without fixed direc 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 without fixed direc 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 without fixed direct front rotary 850 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 without fixed direct front rotary 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without fixed 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without fixed 600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 without fixed direct front r 850 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 without fixed 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 without fixed 600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX100...160 without fixed direct front r 850 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 without fixed direct front r 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed direc 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed direc 600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed direct front rotary 850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX250 without fixed direc 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX250 without fixed direc 600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G wall-mounted enclosure ComPact NSX250 without fixed direct front rotary 850 mm PrismaSeT G floor-standing enclosure ComPact NSX250 without fixed direct front rotary 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed direct front rota 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 with fixed di 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 with fixed di 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed direct front rota 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS100...160 with fixed di 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS100...160 with fixed di 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS100...160 with fixed direct front rota 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed direct front rotary ha 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed direct front rotary ha 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 with fixed direct fr 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 with fixed direct fr 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed direct front rotary ha 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed direct front rotary ha 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed direct front rotary ha 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed direct front rotary ha 600 + 300 mm PrismaSeT G floor-standing enclosure + duct EasyPact CVS250 with fixed direct fr 600 + 300 mm PrismaSeT G wall-mounted enclosure + duct EasyPact CVS250 with fixed direct fr 600 mm PrismaSeT G floor-standing enclosure EasyPact CVS250 with fixed direct front rotary ha 600 mm PrismaSeT G wall-mounted enclosure EasyPact CVS250 with fixed direct front rotary ha 600 + 300 mm PrismaSeT G floor-standing enclosure + duct ComPact NSX100...160 with fixed di 600 mm PrismaSeT G wall-mounted enclosure + duct ComPact NSX100...160 with fixed di 600 mm PrismaSeT G floor-standing enclosure ComPact NSX100...160 with fixed direct front rota

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.200 Cm
Package 1 Width	19.200 Cm
Package 1 Length	47.000 Cm
Package 1 Weight	1.122 Kg
Unit Type of Package 2	S04
Number of Units in Package 2	16
Package 2 Height	30.000 Cm
Package 2 Width	40.000 Cm
Package 2 Length	60.000 Cm
Package 2 Weight	18.526 Kg

Offer Sustainability

Sustainable packaging	No
Environmental Disclosure	Product Environmental Profile
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No, we have minimized the use of plastic in the packaging in compliance with regulations and c
SCIP Number	4758f26b-dbf8-498a-a5c2-4de140d6aa9a
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead, which is known to the S
Halogen-free status	Halogen free plastic parts product
PVC free	Yes
Silicone-free	Yes
End of life manual availability	No need of specific recycling operations
Take-back	No

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised