
# Product data sheet
## Characteristics

# LVS03401
Rail, PrismaSeT P, for modular device, W650 mm

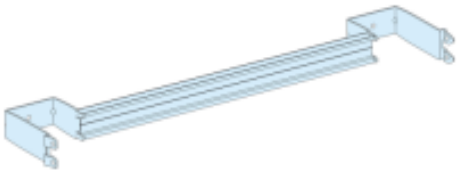

## Main

| | |
|---|---|
| Range | PrismaSeT |
| Range of product | PrismaSeT P |
| Product or component type | Rail |
| Accessory / separate part category | Installation accessory |
| Range compatibility | PrismaSeT PrismaSeT P |
| Type of rail | Modular |
| Installed device | Acti 9: fixed C120 without earth leakage protection - control: toggle<br>TeSys: fixed GV2LE<br>TeSys: fixed GV2ME<br>TeSys: fixed GV2RTn<br>Acti 9: fixed iC120 without earth leakage protection - control: toggle<br>Vigilohm: IM20<br>Vigilohm: IM20H<br>ComPact: fixed INS100 - control: direct front rotary handle - vertical installation<br>ComPact: fixed INS160 - control: direct front rotary handle - vertical installation<br>ComPact: fixed INS40 - control: direct front rotary handle - vertical installation<br>ComPact: fixed INS63 - control: direct front rotary handle - vertical installation<br>Acti 9: fixed modular device<br>Multi9: fixed modular device<br>Multi9: fixed NG125 without earth leakage protection - control: toggle<br>Multi9: fixed NG125 NA - control: toggle<br>Vigirex: RH10<br>Vigirex: RH21<br>Vigirex: RH99<br>Acti 9: fixed C120 with earth leakage protection - control: toggle<br>Acti 9: fixed iC120 with earth leakage protection - control: toggle<br>Multi9: fixed NG125 with earth leakage protection - control: toggle<br>Acti 9: fixed 1/2 or 1 module lamp - horizontal installation<br>ComPact: fixed INS125 - control: direct front rotary handle - vertical installation<br>Acti 9: fixed modular device <= 40 A<br>Multi9: fixed modular device <= 40 A<br>Vigilohm: IM10<br>Vigilohm: IM10H<br>Vigilohm: IM9<br>Vigilohm: IM9-OL<br>Acti 9: measurement device<br>Multi9: measurement device<br>Vigirex: RH197M |
| Poles description | 1 x 3P: fixed C120<br>1 x 4P: fixed C120<br>9 x 3P: fixed GV2LE<br>9 x 3P: fixed GV2ME<br>9 x 3P: fixed GV2RTn<br>1 x 3P: fixed iC120<br>1 x 4P: fixed iC120<br>1 x 3P: fixed INS100 vertical installation<br>1 x 4P: fixed INS100 vertical installation<br>1 x 3P: fixed INS160 vertical installation<br>1 x 4P: fixed INS160 vertical installation<br>1 x 3P: fixed INS40 vertical installation<br>1 x 4P: fixed INS40 vertical installation<br>1 x 3P: fixed INS63 vertical installation<br>1 x 4P: fixed INS63 vertical installation<br>1 x 3P: fixed NG125<br>1 x 4P: fixed NG125<br>1 x 3P: fixed NG125 NA<br>1 x 4P: fixed NG125 NA<br>1 x 3P: fixed INS125 vertical installation<br>1 x 4P: fixed INS125 vertical installation |

## Complementary

| | |
|---|---|
| Enclosure/cubicle description | Cubicle - width 650 mm depth 400 mm |
| Enclosure nominal height | 2000 Mm |
| Number of vertical modules [50 mm] | 2 module(s): 1/2 or 1 module lamp, direct in 650 mm Widecubicle<br>5 module(s): C120 without earth leakage protection , direct in 650 mm Widecubicle<br>3 module(s): GV2LE, direct in 650 mm Widecubicle<br>3 module(s): GV2ME, direct in 650 mm Widecubicle<br>3 module(s): GV2RTn, direct in 650 mm Widecubicle<br>5 module(s): iC120 without earth leakage protection , direct in 650 mm Widecubicle<br>4 module(s): IM10 in 650 mm Widecubicle<br>4 module(s): IM10H in 650 mm Widecubicle<br>4 module(s): IM20 in 650 mm Widecubicle<br>4 module(s): IM20H in 650 mm Widecubicle<br>3 module(s): IM9 in 650 mm Widecubicle<br>3 module(s): IM9-OL in 650 mm Widecubicle<br>4 module(s): INS100, direct in 650 mm Widecubicle<br>5 module(s): INS100, direct in 650 mm Widecubicle<br>4 module(s): INS125, direct in 650 mm Widecubicle<br>5 module(s): INS125, direct in 650 mm Widecubicle<br>4 module(s): INS160, direct in 650 mm Widecubicle<br>5 module(s): INS160, direct in 650 mm Widecubicle<br>4 module(s): INS40, direct in 650 mm Widecubicle<br>4 module(s): INS63, direct in 650 mm Widecubicle<br>3 module(s): measurement device in 650 mm Widecubicle<br>3 module(s): modular device <= 40 A, direct in 650 mm Widecubicle<br>8 module(s): modular device <= 40 A, direct in 650 mm Widecubicle<br>4 module(s): modular device, direct in 650 mm Widecubicle<br>5 module(s): NG125 without earth leakage protection , direct in 650 mm Widecubicle<br>5 module(s): NG125 NA, direct in 650 mm Widecubicle<br>3 module(s): RH10 in 650 mm Widecubicle<br>3 module(s): RH197M in 650 mm Widecubicle<br>3 module(s): RH21 in 650 mm Widecubicle<br>3 module(s): RH99 in 650 mm Widecubicle<br>5 module(s): C120 with earth leakage protection , direct in 650 mm Widecubicle<br>5 module(s): iC120 with earth leakage protection , direct in 650 mm Widecubicle<br>5 module(s): NG125 with earth leakage protection , direct in 650 mm Widecubicle |
| 9 mm pitches | 48 |
| Quantity per set | Set of 1 |
| Height | 43 Mm |
| Width | 592 Mm |
| Depth | 126 Mm |
| Net weight | 0.5 Kg |
| Colour | Natural |
| Material | Metal |

## Environment

| | |
|---|---|
| Standards | IEC 61439-2<br>IEC 61439-1 |
| Product certifications | ASTA |

## Packing Units

| | |
|---|---|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 4.300 Cm |
| Package 1 Width | 12.800 Cm |
| Package 1 Length | 60.500 Cm |
| Package 1 Weight | 504.000 G |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 12 |
| Package 2 Height | 14.800 Cm |
| Package 2 Width | 27.600 Cm |
| Package 2 Length | 62.700 Cm |
| Package 2 Weight | 6.370 Kg |
| Unit Type of Package 3 | P12 |

| | |
|---|---|
| Number of Units in Package 3 | 240 |
| Package 3 Height | 67.000 Cm |
| Package 3 Width | 80.000 Cm |
| Package 3 Length | 120.000 Cm |
| Package 3 Weight | 139.400 Kg |

## Offer Sustainability

| | |
|---|---|
| REACh free of SVHC | Yes |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| Sustainable packaging | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| REACh Regulation | Free of Substances of Very High Concern above the threshold |
| EU RoHS Directive | Compliant |
| Halogen-free status | Halogen free plastic parts product |
| PVC free | Yes |
| Silicone-free | Yes |
| End of life manual availability | No need of specific recycling operations |
| Take-back | No |

## Contractual warranty

| | |
|---|---|
| Warranty (in months) | 18 |

Product Life Status : Commercialised