
Product data sheet
Characteristics

LXD3P7
Contactor coil, TeSys Deca, LXD3, 230V AC 50/60Hz for 40-65A contactor

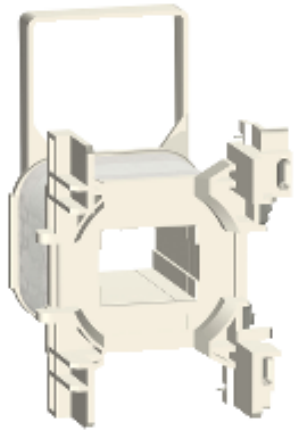

Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LXD3
Control circuit type	AC at 50/60 Hz
[Uc] control circuit voltage	230 V AC 50/60 Hz
Average resistance	192 Ohm at 20 °C
Inductance of closed circuit	10.9 H
Product compatibility	LC1DT80A LC1D40A...D65A LC1DT60A
Mechanical durability	6 Mcycles
Maximum operating rate	3600 Cyc/H 60 °C

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out: 0.3...0.6 Uc at 50/60 Hz (at <60 °C) Operational: 0.8...1.1 Uc at 50 Hz (at <60 °C) Operational: 0.85...1.1 Uc at 60 Hz (at <60 °C)
Inrush power in VA	160 VA 60 Hz cos phi 0.75 (at 20 °C) 160 VA 50 Hz cos phi 0.75 (at 20 °C)
Hold-in power consumption in VA	15 VA 60 Hz cos phi 0.3 (at 20 °C) 15 VA 50 Hz cos phi 0.3 (at 20 °C)
Heat dissipation	4…5 W at 50/60 Hz

Environment

Ambient air temperature for operation	-5…60 °C
Net weight	0.07 Kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.8 Cm
Package 1 Width	5.8 Cm
Package 1 Length	9.8 Cm
Package 1 Weight	121 G
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	15 Cm

Package 2 Width	30 Cm
Package 2 Length	40 Cm
Package 2 Weight	4.085 Kg
Unit Type of Package 3	P06
Number of Units in Package 3	240
Package 3 Height	80 Cm
Package 3 Width	80 Cm
Package 3 Length	60 Cm
Package 3 Weight	50.54 Kg

Offer Sustainability

REACh free of SVHC	Yes
Toxic heavy metal free	Yes
Mercury free	Yes
Sustainable packaging	Yes
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
REACh Regulation	Free of Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxi
PVC free	Yes
Take-back	No

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised