Product datasheet

Specifications



Plug in relay, Harmony Relay, miniature, RXM, 2 C/O, 120 V AC, 10 A

RXM2CB1F7

Discontinued on: 1 Jul 2020

Discontinued

Main

Range of product	Harmony Relay
Series name	Miniature
Product or component type	Plug-in relay
Device short name	RXM
Utilisation coefficient	20 %
Sale per indivisible quantity	10

Complementary

Contact operation	Standard
[Uc] control circuit voltage	120 V AC 50/60 Hz
[Ithe] conventional enclosed thermal current	10 A at -40…55 °C
status LED	Without
[Ui] rated insulation voltage	250 V conforming to IEC 300 V conforming to UL
[Uimp] rated impulse withstand voltage	3.6 kV during 1.2/50 µs conforming to IEC 61810-7
Contacts material	Silver alloy (Ag/Ni)
[Ie] rated operational current	10 A (AC-1/DC-1) conforming to UL 10 A (AC-1/DC-1) NO conforming to IEC 5 A (AC-1/DC-1) NC conforming to IEC
minimum switching current	10 mA
Maximum switching voltage	250 V AC 125 V DC
Minimum switching voltage	17 V
Load current	10 A at 250 V AC 10 A at 30 V DC
Maximum switching capacity	2500 VA AC 300 W DC
Minimum switching capacity	170 mW
Operating rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Mechanical durability	10000000 cycles
Average coil consumption in VA	1.2 AC
Drop-out voltage threshold	>= 0.15 Uc AC
Operating time	20 ms

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Average resistance	4500 Ohm at 20 °C +/- 15 %
Rated operational voltage limits	96...132 V AC
Protection category	RT I
Test levels	Level A group mounting
Operating position	Any position
Net weight	0.035 kg
Safety reliability data	B10d = 100000
Electrical durability	100000 cycles for resistive load
Dielectric strength	1800 V AC between coil and contact 1550 V AC between poles 1000 V AC between contacts
Pollution degree	3

Environment

Product certifications	GOST UL EAC
Standards	IEC 61810-1 UL 508
Ambient air temperature for storage	-40…70 °C
Ambient air temperature for operation	-40…55 °C
Vibration resistance	3 gn, amplitude = +/- 1 mm (f = 10…150 Hz)without clip conforming to IEC 60068-2-6 5 gn, amplitude = +/- 1 mm (f = 10…150 Hz)with clip conforming to IEC 60068-2-6
IP degree of protection	IP40 conforming to IEC 60529
Shock resistance	10 gn (duration = 11 ms) for opening conforming to IEC 60068-2-27 10 gn (duration = 11 ms) for closing conforming to IEC 60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >


Use Again

Repack and remanufacture


WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

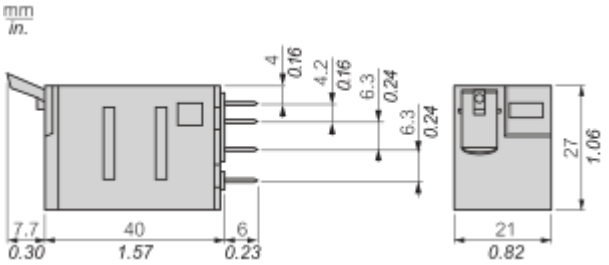



Pin Side View



Connections and Schema

Wiring Diagram






Symbols shown in blue correspond to Nema marking.

Performance Curves


Electrical Durability of Contacts

Resistive Load

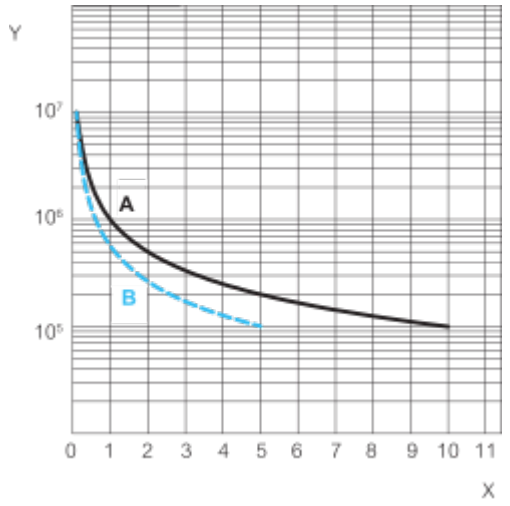

X : Contact current (A)
Y : Durability (Number of operating cycles)
A : RXM2CB•••
B : RXM4CB•••
Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.


Inductive Load

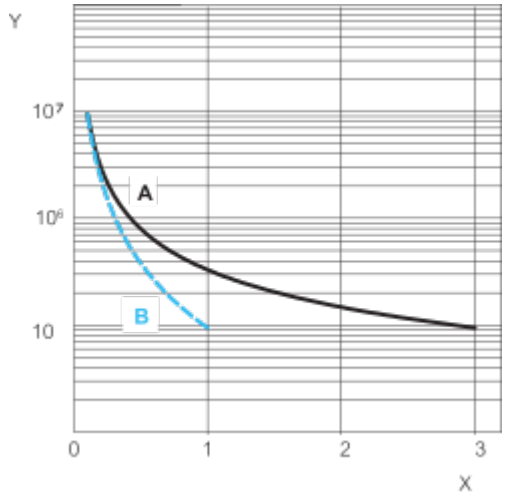

X : Contact current (A)
Y : Durability (Number of operating cycles)
A : RXM2CB•••
B : RXM4CB•••
Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Maximum Switching Capacity on Resistive and Inductive Loads


RXM2CB•••

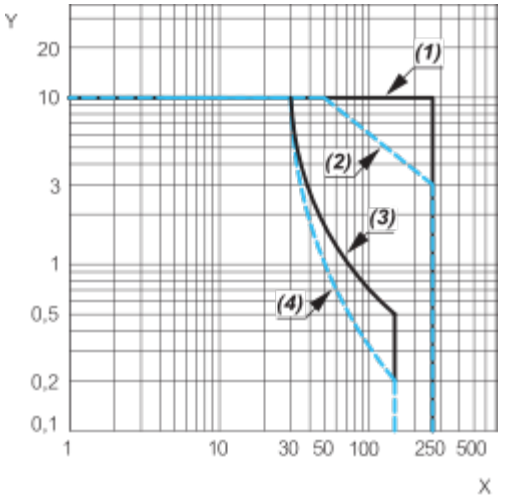

X : Switching Voltage (V)
Y : Switching Current (A)
(1) : AC resistive load
(2) : AC inductive load (cos phi = 0.4)
(3) : DC resistive load
(4) : DC inductive load (T0.95 = 6 P)
Note : These are typical curves, actual switching capacity depends on load, environment, duty cycle, etc.

Coil Operating Range

AC Coil Voltage VS Operating Temperature under continuous duty

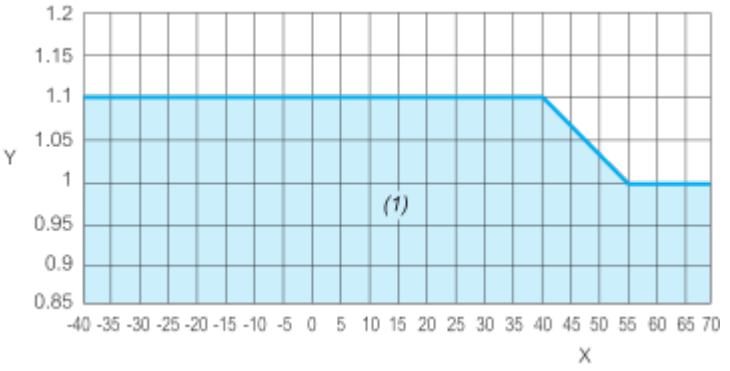


X : Operating Temperature (°C)
Y : AC Coil Voltage (U/Uc)
(1) : Permitted operating range area


Image of product / Alternate images

Alternative



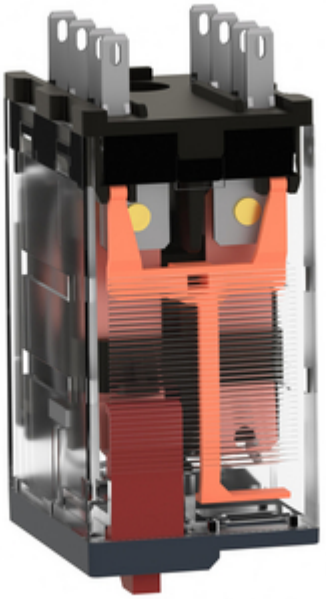



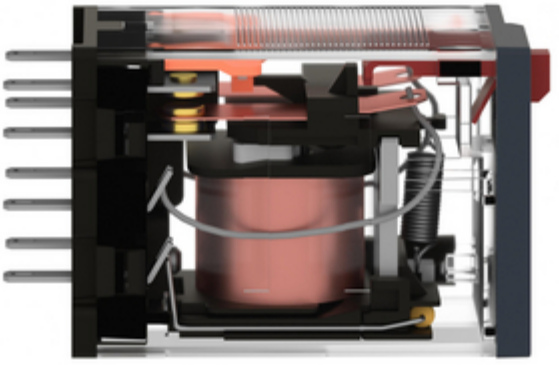


RXM
Schneider Electric

