Product datasheet

Specifications



60mm Tower ROG Base Mount Buzzer Flash

Local distributor code:

403035766 XVC6B35SK

Discontinued on: 31 May 2026

EAN Code: 3606480032714

Discontinued

Main

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70…85 dB (continuous or intermittent tone) at 1 m

Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover
Product mounting	On base
Cable cross section	0.33 mm²
AWG gauge	22 AWG
Cable length	850 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	115 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net weight	0.3 kg
Height	200.8 mm

Environment

Standards	IEC 61000-6-4 IEC 61000-6-3 IEC 61000-6-2

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35…70 °C
Ambient air temperature for operation	-10…50 °C
Electrical shock protection class	Class II conforming to IEC 61140
IP degree of protection	IP54 flat surface installation conforming to IEC 60529

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.800 cm
Package 1 Width	8.500 cm
Package 1 Length	50.500 cm
Package 1 Weight	528.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	6.572 kg

Logistical informations

Country of origin	ID

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**25 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.6 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**20 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.5 kg CO2 eq.**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant By Exemption**

Use Again

Repack and remanufacture


Take-back	**No**


Dimensions Drawings

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.



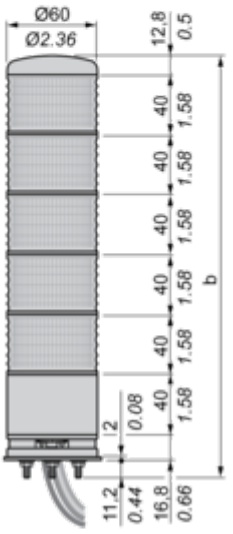

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out




Image of product / Alternate images

Alternative











