Product datasheet

Specifications



Multi-sound Siren

Local distributor code:

398334970 XVS14BMW

EAN Code: 3606480032943

Main

Range of product	Harmony XVS
Product or component type	Multisound siren
Device short name	XVS

Complementary

Colour	White
Material	ASA (Acrylonitrile Styrene Acrylate): front ASA (Acrylonitrile Styrene Acrylate): back PC (polycarbonate): back cover
Net weight	1 kg
Marking	CE
Mounting support	Bracket
fixing mode	3 holes Ø 9 mm
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	350 mA at 24 V 250 mA at 12 V
Electrical connection	Cable: 6.5…8.5 mm, 0.33 mm² / 22 AWG (signalling circuit) Cable: 6.5…8.5 mm, 0.52 mm² / 20 AWG (power circuit)
Width	140 mm
Height	114 mm
Depth	223 mm

Environment

Signalling type	43 tones siren
Standards	IEC 61000-6-2 EN 55014-2 EN 55022 IEC 61000-6-3
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35…70 °C
Ambient air temperature for operation	-10…50 °C
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP53 conforming to IEC 60529

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Us] rated supply voltage	12 V DC 24 V DC
Noise level	0…105 dB (continuous or intermittent tone) at 1 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	27.500 cm
Package 1 Width	16.000 cm
Package 1 Length	16.000 cm
Package 1 Weight	1.340 kg
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	9.302 kg

Logistical informations

Country of origin	ID

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**13 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**10 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0.2 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0.6 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.1 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**2 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**Fe0ee3ab-dd49-4abe-bd8e-c49754e2c442**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Reference contains Substances of Very High Concern above the threshold**

Use Again

Repack and remanufacture

Recyclability potential, in %	**18**
End of life manual availability	**End of Life Information**
Take-back	**No**

Dimensions Drawings

Siren

Dimensions

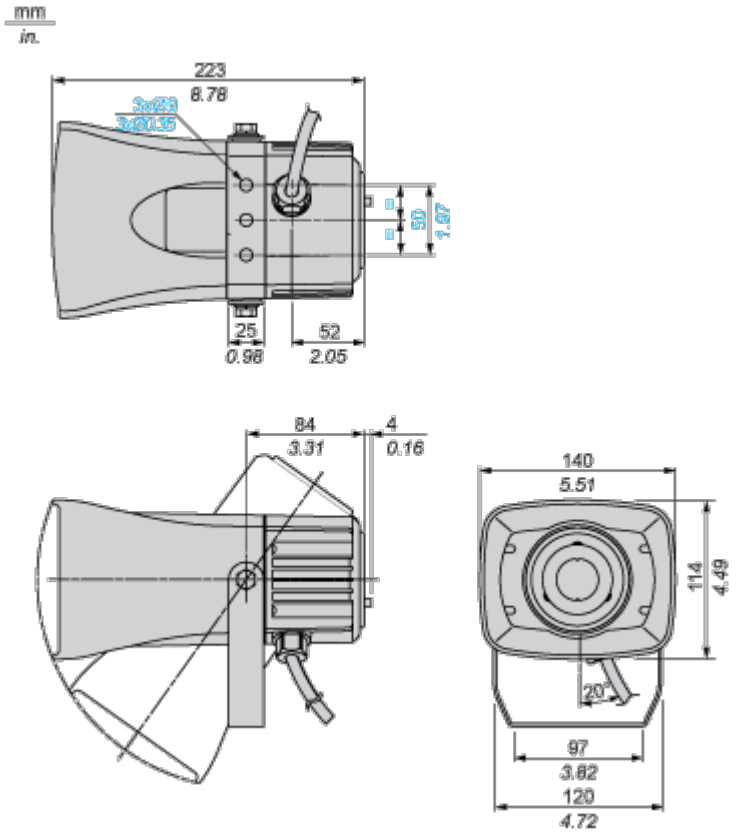


Image of product / Alternate images

Alternative

