Product datasheet

Specifications



Harmony, Harmony Hub, wireless to modbus, serial line gateway, 24...240 V AC/DC

ZBRN2

Discontinued on: 7 Oct 2026

To be discontinued

EAN Code: 3606480528491

Main

Range of product	Harmony
Product or component type	Harmony Hub wireless/Serial Line gateway
Device short name	ZBRN2
Product specific application	Wireless Schneider Electric devices ecosystem
Function of module	Zigbee green power concentrator
Communication port protocol	Modbus client application
Antenna type	Integrated
Transmission frequency	2405…2480 MHz

Complementary

Maximum radio communication distance	100 m in free field 250 m if a relay antenna is located between the transmitter and Harmony Hub 60 m if an external antenna is connected to Harmony Hub 25 m with Harmony Hub installed in a metal housing or in a closed metal enclosure
Radio response time	< 30 ms
Radio channels utilisation	<= 60 devices
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz - 10...10 %
Immunity to microbreaks	10 ms
Maximum power consumption in W	4 W AC/DC
Breaking capacity	15 W
Breaking capacity	750 VA
Control circuit frequency	50...60 Hz +/- 10 %
Short-circuit protection	16 A GB2 circuit breaker
Operating position	Any position
Mounting support	35 mm symmetrical DIN rail conforming to IEC 60715 Mounting plate
Electrical connection	1 conductor cable 0.2…4 mm² - 24 AWG...12 AWG - solid - without cable end conforming to IEC 60947-1 2 conductors cable 0.2…1.5 mm² - 24 AWG...16 AWG - solid - without cable end conforming to IEC 60947-1 1 conductor cable 0.2…0.75 mm² - 24 AWG...14 AWG - flexible - with cable end conforming to IEC 60947-1 2 conductors cable 0.2…2.5 mm² - 24 AWG...18 AWG - flexible - with cable end conforming to IEC 60947-1
Tightening torque	0.35…0.4 N.m conforming to IEC 60947-1 0.35…0.40 N.m conforming to IEC 60947-1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Housing material	Polycarbonate
Status LED	1 LED green for power ON 1 LED yellow for communication network 5 LEDs red for function mode 1 LED green and yellow for reception signal
Rated short-duration power frequency withstand voltage	1.5 kV 50 Hz conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV
Surge withstand	1 kV differential mode conforming to IEC 61000-4-5 2 kV common mode conforming to IEC 61000-4-5
Width	122 mm
Height	90 mm
Depth	60 mm
Net weight	0.27 kg
Antenna gain	0 dBi
Integrated connection type	1 isolated serial link 2 x RJ45 in parallel Modbus Serial line slave Modbus slave RTU asynchronous in baseband RS485, half duplex, 1.2...115.2 kbauds, 2 twisted shielded pairs
Data storage equipment	SD card
Topology	Devices linked by daisy-chaining or tap junctions
Data format	7 or 8 bits, 1 or 2 stop bits
Parity	No Even Odd

Environment

Radio agreement	ANATEL, type III conforming to ETSI EN 301 489-3 FCC, category 2 conforming to ETSI EN 300 440-1 ICASA RSS, category 1 conforming to ETSI EN 300 440-1 SRRC
Product certifications	GOST CE UL C-Tick CSA CCC
Directives	2006/95/EC - low voltage directive 2004/108/EC - electromagnetic compatibility 1999/5/EC - R&TTE directive
Standards	CSA C22.2 No 14 IEC 62311 IEC 61131-2 ETSI EN 300 440-2 ETSI EN 300 328 IEC 60950-1 UL 508
Ambient air temperature for storage	-40…70 °C
Relative humidity	90 % at -25…55 °C, without condensation conforming to ETSI EN 300 440-1
Operating altitude	0...2000 m
Storage altitude	0…3000 m
Vibration resistance	+/- 3.5 mm (f = 5…14 Hz) conforming to IEC 60068-2-6 1 gn (f = 5…150 Hz) on panel mounting conforming to IEC 60068-2-6 2 gn (f = 8…150 Hz) on DIN rail conforming to IEC 60068-2-6
Shock resistance	10 gn (duration = 16 ms) for 6000 shocks conforming to IEC 60068-2-27

IP degree of protection	IP20 (casing) conforming to IEC 60529 IP20 (terminals)
Pollution degree	2 conforming to IEC 60664-1
Electromagnetic compatibility	1.2/50 µs shock waves immunity test - test level: 1 kV (differential mode) conforming to IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 2 kV (common mode) conforming to IEC 61000-4-5 Immunity to microbreaks and voltage drops - test level: 10 ms conforming to IEC 61000-4-11
Dielectric strength	3000 V between input and output AC 4250 V between input and output DC 1500 V between input and ground AC 2150 V between input and ground DC

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.300 cm
Package 1 Width	9.600 cm
Package 1 Length	13.000 cm
Package 1 Weight	308.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	10
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.519 kg

Logistical informations

Country of origin	ID

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**34 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**31 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.2 kg CO2 eq.**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
SCIP Number	**25b7f895-3732-43c8-9910-ef6005058640**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Reference contains Substances of Very High Concern above the threshold**

Use Again


Repack and remanufacture

End of life manual availability	**End of Life Information**
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins**

Dimensions Drawings


Dimensions

For your information existing access point product is now named “Harmony Hub”

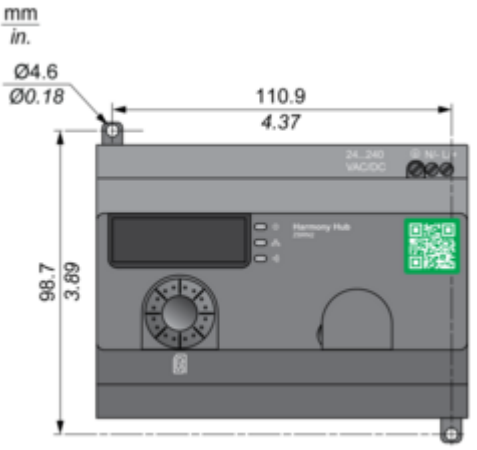


Mounting and Clearance

Harmony Hub on a Mounting Panel

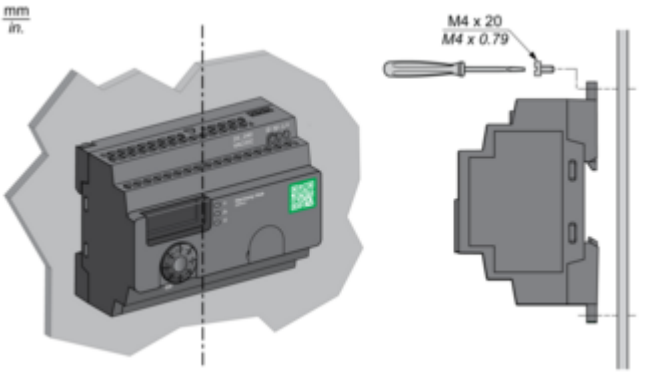


Harmony Hub is installed according to its vertical axis

Harmony Hub on DIN Rail Mounting

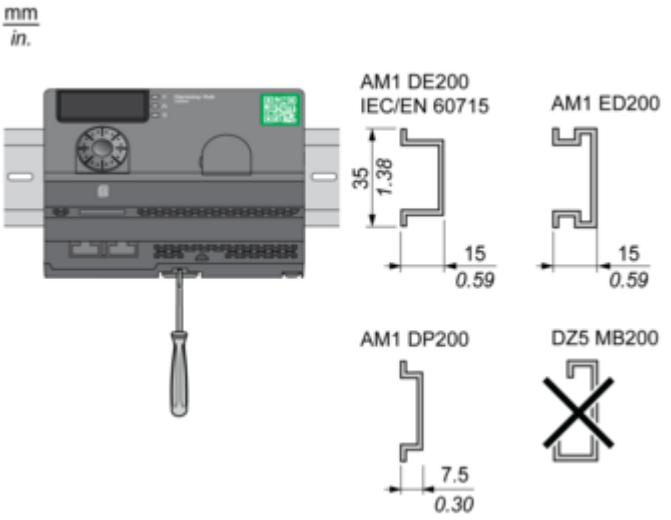


Clearances

Maximum Distance between Transmitter and Harmony Hub in Free Field Unobstructed

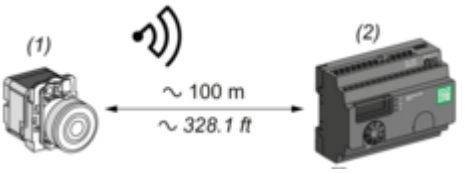


(1) Transmitter
(2) Harmony Hub

Maximum Distance between Transmitter and Harmony Hub in a Metal Enclosure with a Relay Antenna

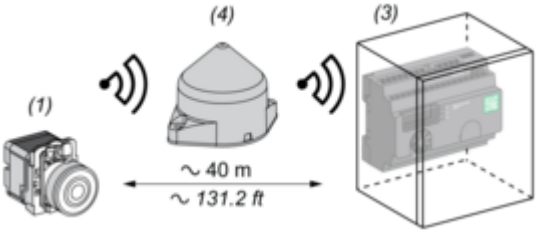

(1) Transmitter
(3) Harmony Hub in a metal enclosure
(4) Relay antenna


Maximum Distance between Transmitter and Harmony Hub in a Metal Enclosure with a Passive Antenna

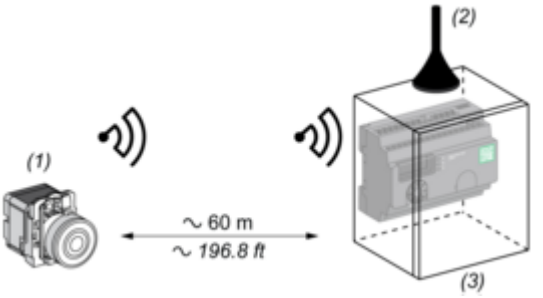

(1) Transmitter
(2) External antenna
(3) Harmony Hub in a metal enclosure
The range is reduced if the transmitter is placed in a metal enclosure (reduction factor : approx 10%)

Glass window	10...20 %
Plaster wall	30...45 %
Brick wall	60 %
Concrete wall	70...80 %
Metal structure	50...100 %


Harmony Hub Clearances

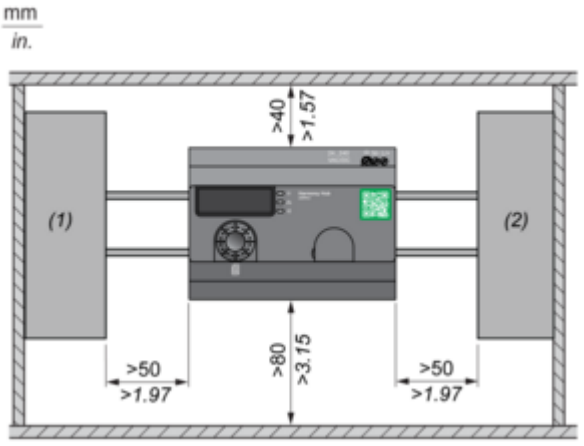


(1) PLC or other devices
(2) Power supply or other devices

Connections and Schema

Harmony Hub Wiring Diagram

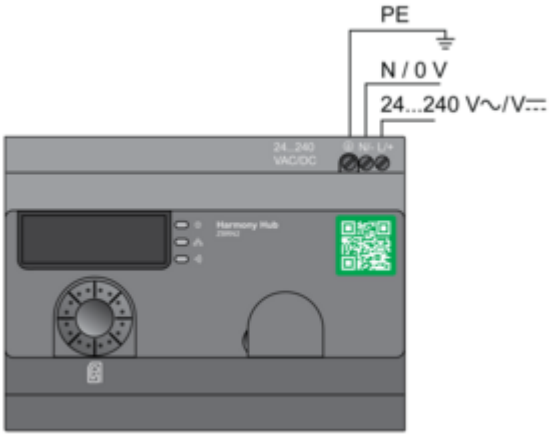



(1) Wire sizes for Power Supply terminals (L/+, N/-)

Image of product in real life situation

