
Product data sheet
Characteristics

LVS04495
Connection, PrismaSeT P, for MTZ2/NW 3P, 2500A, horizontal Linergy LGYE busbar

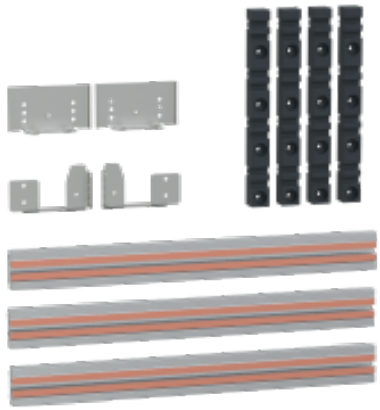

Main

Range	PrismaSeT
Range of product	PrismaSeT P
Product or component type	Connection
Range compatibility	PrismaSeT PrismaSeT P enclosure Masterpact MasterPact NW
Accessory / separate part category	Current distribution accessory
Standards	IEC 61439-2, inside enclosure IEC 61439-1, inside enclosure
Product certifications	ASTA

Complementary

Cubicle-device connection	Connection transfer assembly
Poles description	3P
Enclosure/cubicle description	Cubicle - width 650 mm
Cubicle depth	600 mm: front 600 + 400 mm: rear
Installed device	Masterpact: drawout NW20...25 - control: toggle vertical installation - bottom connection Masterpact: fixed NW20...25 - control: toggle vertical installation - bottom connection
[Ie] rated operational current	2500 A
Length	580 Mm
Quantity per set	Set of 1
Enclosure/cubicle width	650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 fron 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 re 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 fron 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 fron 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 re 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 drawout toggle vertical 3P 1 fron 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 fixed toggle vertical 3P 1 front c 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW20...25 fixed toggle vertical 3P 1 rear c 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 fixed toggle vertical 3P 1 front c 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW20...25 fixed toggle vertical 3P 1 rear c 650 mm 600 mm PrismaSeT P cubicle Masterpact NW20...25 fixed toggle vertical 3P 1 front c 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW08...16 drawout toggle vertical 4P 1 re 650 mm 600 mm PrismaSeT P cubicle Masterpact NW08...16 drawout toggle vertical 4P 1 fron 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW08...16 drawout toggle vertical 4P 1 re 650 mm 600 mm PrismaSeT P cubicle Masterpact NW08...16 drawout toggle vertical 4P 1 fron 650 mm 600 mm PrismaSeT P cubicle Masterpact NW08...16 fixed toggle vertical 4P 1 front c 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW08...16 fixed toggle vertical 4P 1 rear c 650 mm 600 mm PrismaSeT P cubicle Masterpact NW08...16 fixed toggle vertical 4P 1 front c 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW08...16 fixed toggle vertical 4P 1 rear c 650 mm 600 mm PrismaSeT P cubicle Masterpact NW08...16 fixed toggle vertical 4P 1 front c

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.500 Cm
Package 1 Width	19.500 Cm
Package 1 Length	61.000 Cm
Package 1 Weight	11.900 Kg
Unit Type of Package 2	P12
Number of Units in Package 2	16
Package 2 Height	35.500 Cm
Package 2 Width	80.000 Cm
Package 2 Length	120.000 Cm
Package 2 Weight	201.500 Kg

Offer Sustainability

Recyclability potential, in %	98
Total lifecycle Carbon footprint	343 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	161.5056615
Carbon footprint of the manufacturing phase [A1 to A3]	162 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	1.556115047
Carbon footprint of the distribution phase [A4]	2 kg CO2 eq.
Carbon footprint of the installation phase [A5]	1.141290342
Carbon footprint of the installation phase [A5]	1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	173.4694828
Carbon footprint of the use phase [B2, B3, B4, B6]	173 kg CO2 eq.
Sustainable packaging	No
Carbon footprint of the end-of-life phase [C1 to C4]	5.423921284
Carbon footprint of the end-of-life phase [C1 to C4]	5 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile
Total lifecycle Carbon footprint	343
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No, we have minimized the use of plastic in the packaging in compliance with regulations and cons
REACh Regulation	Reference contains Substances of Very High Concern above the threshold
EU RoHS Directive	Compliant By Exemption
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and Nickel (Metallic), which
Halogen-free status	Halogen free plastic parts product
PVC free	Yes
Silicone-free	Yes
End of life manual availability	No need of specific recycling operations
Take-back	No

Contractual warranty

Warranty (in months)	18

Product Life Status : Commercialised