SIEMENS

## Data sheet 3RH5921-1EA11



First AUX. switch block, 1 NO + 1 NC,DIN EN 50005, lateral, 10 mm, screw terminal, size S0...S12 for motor contactor, 2-pole 1. lateral auxiliary switch

| | |
|---|---|
| **product brand name** | SIRIUS |
| **product category** | Auxiliary switch |
| **product designation** | auxiliary switch |
| **design of the product** | first laterally mountable |
| **suitability for use** | Contactor relay and power contactor |
| **General technical data** | |
| **size of contactor** | S0 |
| insulation voltage with degree of pollution 3 at AC rated value | 500 V |
| **surge voltage resistance rated value** | 6 kV |
| protection class IP on the front | IP20 |
| **mechanical service life (operating cycles) typical** | 10 000 000 |
| electrical endurance (operating cycles) at AC-15 at 230 V typical | 200 000 |
| **Substance Prohibitance (day/month/year)** | 07/01/2006 |
| **Net Weight** | 49 g |
| **number of NC contacts for auxiliary contacts** | |
| ● instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts | |
| ● instantaneous contact | 1 |
| number of CO contacts of auxiliary contacts instantaneous contact | 0 |
| **operational current of auxiliary contacts at AC-12** | |
| ● at 24 V | 10 A |
| ● at 230 V | 10 A |
| **operational current of auxiliary contacts at AC-14** | |
| ● at 125 V | 6 A |
| ● at 250 V | 6 A |
| **operational current of auxiliary contacts at AC-12 maximum** | 10 A |
| **operational current of auxiliary contacts at AC-15** | |
| ● at 24 V | 6 A |
| ● at 230 V | 6 A |
| ● at 400 V | 3 A |
| **operational current of auxiliary contacts at DC-12** | |
| ● at 24 V | 10 A |
| ● at 110 V | 3 A |
| ● at 220 V | 1 A |
| **operational current with 2 current paths in series at DC-12** | |
| ● at 24 V rated value | 10 A |
| ● at 60 V rated value | 10 A |
| ● at 110 V rated value | 4 A |


Subject to change without notice
© Copyright Siemens

| | |
|---|---|
| ● at 220 V rated value | 2 A |
| ● at 440 V rated value | 1.3 A |
| **operational current with 3 current paths in series at DC-12** | |
| ● at 24 V rated value | 10 A |
| ● at 60 V rated value | 10 A |
| ● at 110 V rated value | 10 A |
| ● at 220 V rated value | 3.6 A |
| ● at 440 V rated value | 2.5 A |
| **operational current with 2 current paths in series at DC-13** | |
| ● at 24 V rated value | 10 A |
| ● at 60 V rated value | 3.5 A |
| ● at 110 V rated value | 1.3 A |
| ● at 220 V rated value | 0.9 A |
| ● at 440 V rated value | 0.2 A |
| **operational current with 3 current paths in series at DC-13** | |
| ● at 24 V rated value | 10 A |
| ● at 60 V rated value | 4.7 A |
| ● at 110 V rated value | 3 A |
| ● at 220 V rated value | 1.2 A |
| ● at 440 V rated value | 0.5 A |
| **operational current of auxiliary contacts at DC-13** | |
| ● at 24 V | 6 A |
| ● at 48 V | 2 A |
| ● at 60 V | 2 A |
| ● at 110 V | 1 A |
| ● at 125 V | 0.9 A |
| ● at 220 V | 0.3 A |
| ● at 250 V | 0.3 A |
| **contact reliability of auxiliary contacts** | 1 faulty switching per 100 million (17 V, 1 mA) |
| **Ambient conditions** | |
| **ambient temperature** | |
| ● during operation | -25 ... +60 °C |
| ● during storage | -55 ... +80 °C |
| **Safety related data** | |
| **product function** | |
| ● mirror contact according to IEC 60947-4-1 | Yes |
| ● positively driven operation according to IEC 60947-5-1 | No |
| **Installation/ mounting/ dimensions** | |
| **fastening method** | snap-on mounting |
| **height** | 80 mm |
| **width** | 10 mm |
| **depth** | 71 mm |
| **Connections/ Terminals** | |
| type of electrical connection for auxiliary and control circuit | screw-type terminals |
| **connectable conductor cross-section for auxiliary contacts** | |
| ● solid or stranded | 0.5 ... 2.5 mm² |
| ● finely stranded with core end processing | 0.5 ... 2.5 mm² |
| **type of connectable conductor cross-sections** | |
| ● for auxiliary contacts | |
| — solid or stranded | 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) |
| — finely stranded with core end processing | 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) |
| ● for AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |
| **AWG number as coded connectable conductor cross section for auxiliary contacts** | 20 ... 14 |
| **Approvals Certificates** | |

| Environment | General Product Approval | Maritime application |
|---|---|---|


© Copyright Siemens


Environmental Confirmations

## other

Confirmation


## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/ic10
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH5921-1EA11
**Cax online generator**
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH5921-1EA11
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3RH5921-1EA11
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH5921-1EA11&lang=en

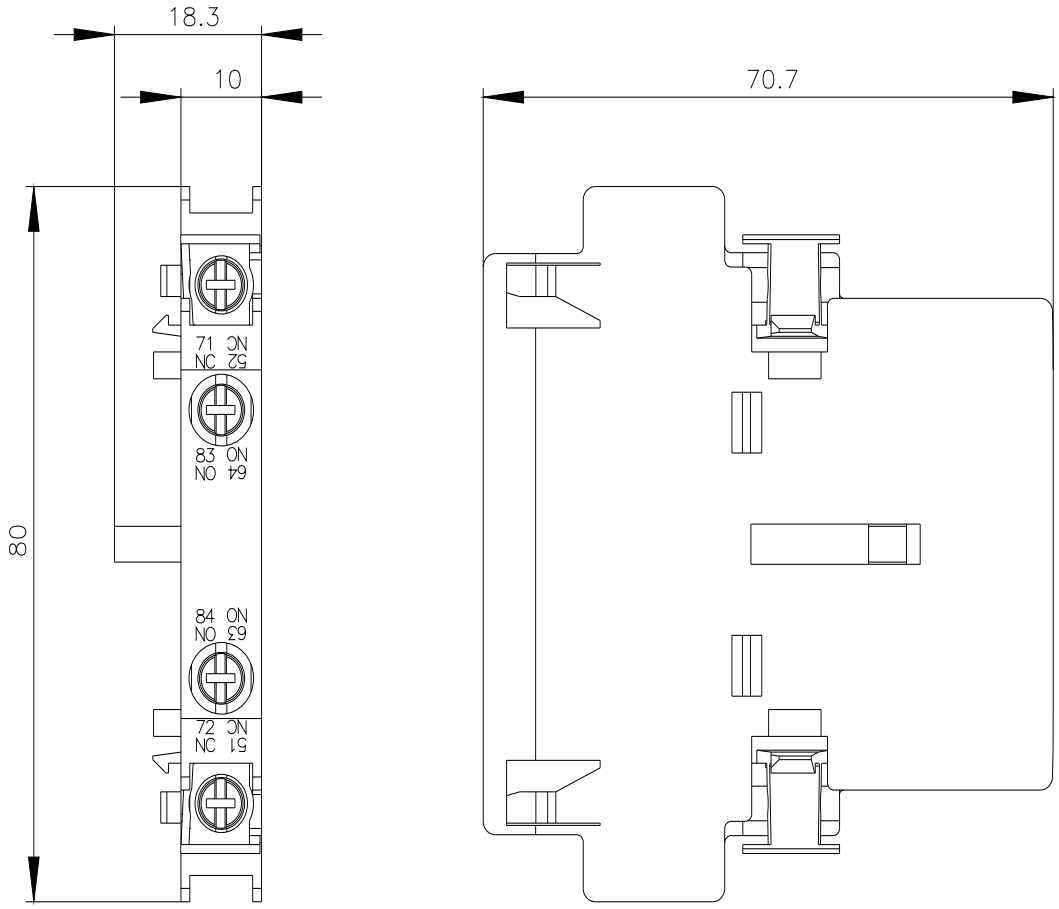



Subject to change without notice
© Copyright Siemens

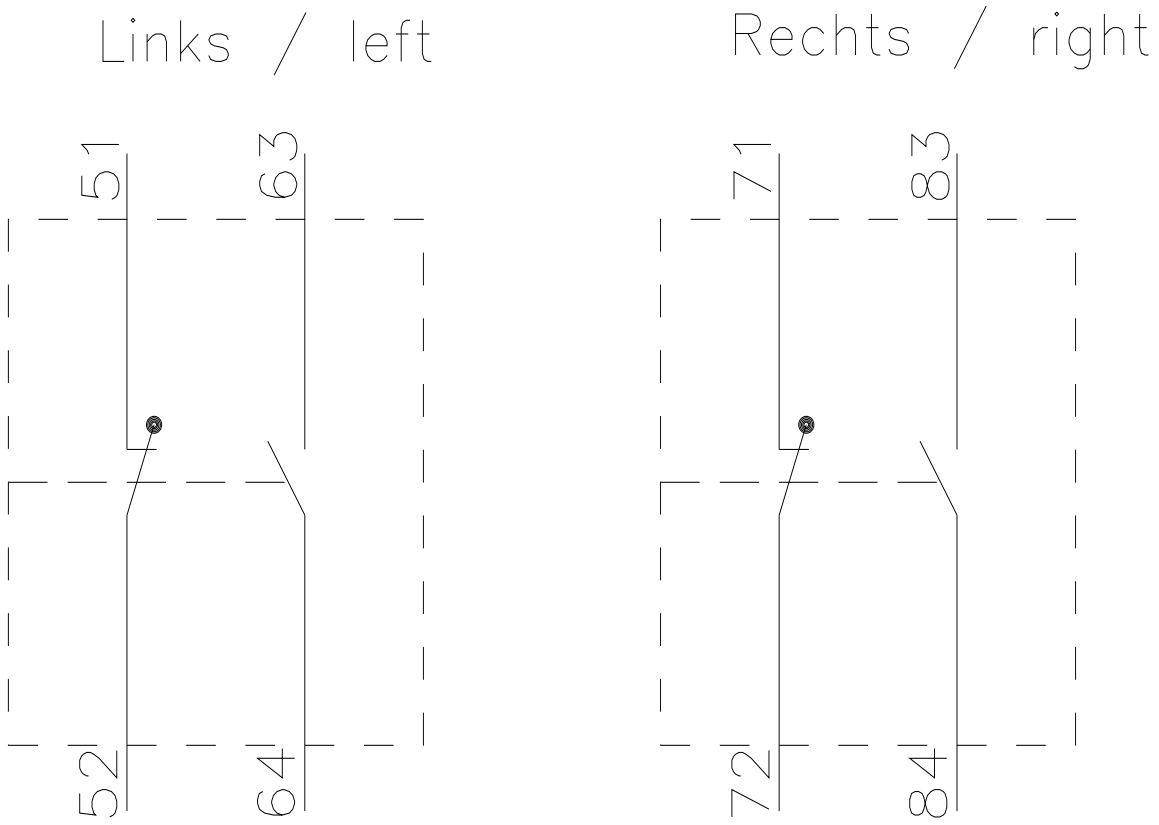


**last modified:** 4/3/2025


Subject to change without notice
© Copyright Siemens