SIEMENS

Data sheet 3RH6911-1DA11



Lateral AUX. switch block, for motor contactors 1 NO + 1 NC, size S00, screw terminal DIN EN 50012 and DIN EN 50005

product brand name	SIRIUS
product category	Auxiliary switch
product designation	auxiliary switch
design of the product	first laterally mountable
suitability for use	Contactor relay and power contactor
General technical data	
size of contactor	S00
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
protection class IP on the front	IP20
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	200 000
Substance Prohibitance (day/month/year)	05/01/2012
Net Weight	40 g
number of NC contacts for auxiliary contacts	
● instantaneous contact	1
● lagging switching	0
number of NO contacts for auxiliary contacts	
● instantaneous contact	1
● leading contact	0
number of CO contacts of auxiliary contacts instantaneous contact	0
operational current at AC-15 at 690 V rated value	1 A
operational current of auxiliary contacts at AC-12	
● at 24 V	10 A
● at 230 V	10 A
operational current of auxiliary contacts at AC-14	
● at 125 V	6 A
● at 250 V	6 A
operational current of auxiliary contacts at AC-12 maximum	10 A
operational current of auxiliary contacts at AC-15	
● at 24 V	6 A
● at 230 V	6 A
● at 400 V	3 A
operational current of auxiliary contacts at DC-12	
● at 24 V	10 A
● at 110 V	3 A
● at 220 V	1 A
operational current with 2 current paths in series at DC-12	

Subject to change without notice
© Copyright Siemens

● at 24 V rated value	10 A
● at 60 V rated value	10 A
● at 110 V rated value	4 A
● at 220 V rated value	2 A
● at 440 V rated value	1.3 A
● at 600 V rated value	0.65 A
operational current with 3 current paths in series at DC-12	
● at 24 V rated value	10 A
● at 60 V rated value	10 A
● at 110 V rated value	10 A
● at 220 V rated value	3.6 A
● at 440 V rated value	2.5 A
● at 600 V rated value	1.8 A
operational current with 2 current paths in series at DC-13	
● at 24 V rated value	10 A
● at 60 V rated value	3.5 A
● at 110 V rated value	1.3 A
● at 220 V rated value	0.9 A
● at 440 V rated value	0.2 A
● at 600 V rated value	0.1 A
operational current with 3 current paths in series at DC-13	
● at 24 V rated value	10 A
● at 60 V rated value	4.7 A
● at 110 V rated value	3 A
● at 220 V rated value	1.2 A
● at 440 V rated value	0.5 A
● at 600 V rated value	0.26 A
operational current of auxiliary contacts at DC-13	
● at 24 V	6 A
● at 48 V	2 A
● at 60 V	2 A
● at 110 V	1 A
● at 125 V	0.9 A
● at 220 V	0.3 A
● at 250 V	0.3 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
Ambient conditions	
ambient temperature	
● during operation	-25 ... +60 °C
● during storage	-55 ... +80 °C
Safety related data	
product function	
● mirror contact according to IEC 60947-4-1	Yes
● positively driven operation according to IEC 60947-5-1	No
Installation/ mounting/ dimensions	
fastening method	snap-on mounting
height	57.4 mm
width	10 mm
depth	66 mm
Connections/ Terminals	
type of electrical connection for auxiliary and control circuit	screw-type terminals
connectable conductor cross-section for auxiliary contacts	
● solid or stranded	0.5 ... 2.5 mm²
● finely stranded with core end processing	0.5 ... 2.5 mm²
type of connectable conductor cross-sections	
● for auxiliary contacts	
— solid or stranded	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)

Subject to change without notice
© Copyright Siemens

AWG number as coded connectable conductor cross section for auxiliary contacts	20 ... 14

Approvals Certificates


Environment	General Product Approval				
Environmental Confirmations	CCC	Confirmation	cULus	EAC	CE EG-Konf.

General Product Approval	Maritime application		other	
UKCA	Lloyd's Register LRS	CCS (China Classification Society)	Confirmation	产品合格 QC PASS

Further information


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH6911-1DA11
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH6911-1DA11
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RH6911-1DA11
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH6911-1DA11&lang=en

Subject to change without notice
© Copyright Siemens

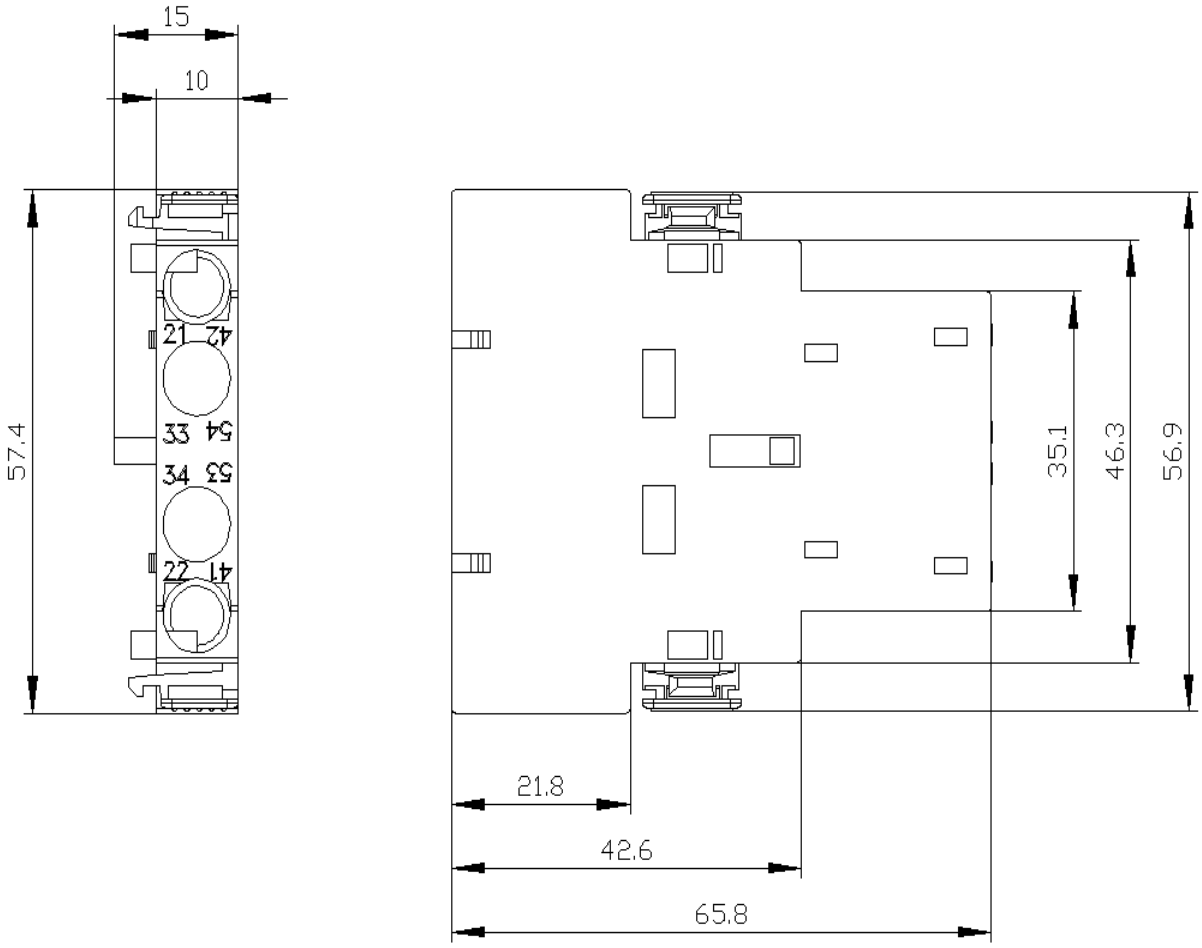


Subject to change without notice
© Copyright Siemens

Links / left

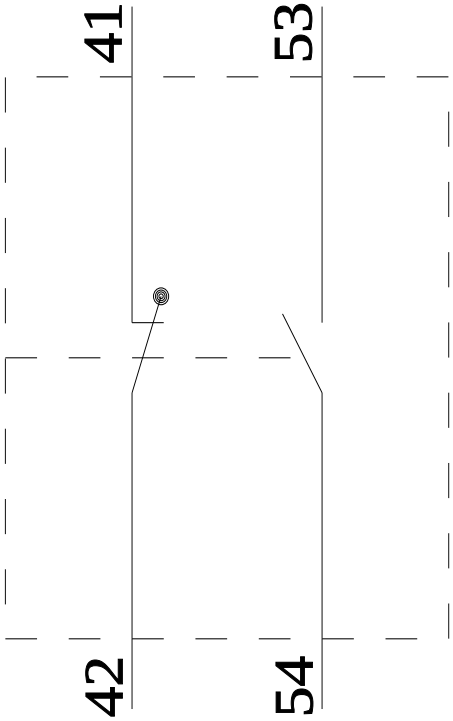

Rechts / right

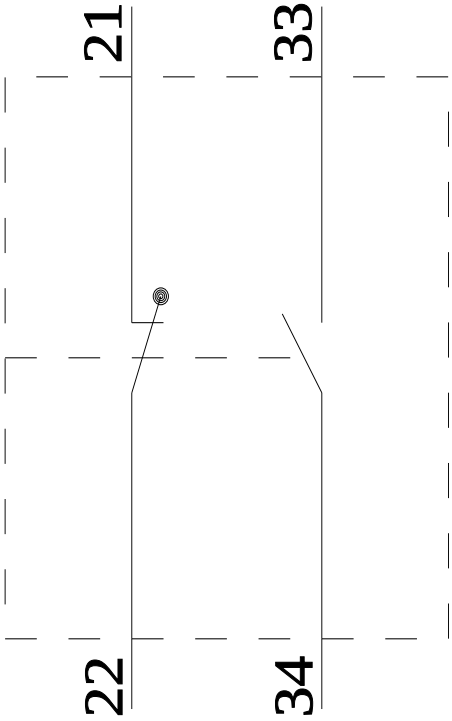

last modified: 4/3/2025

Subject to change without notice
© Copyright Siemens