SIEMENS

## Data sheet 8US1213-4AU01



device adapter MCCB, 3-pole, 144 A busbar center-to-center spacing 60 mm for 3VA10/11, 200 x 77 mm contacting to the adapter is supplied

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | Device adapter |
| **design of the product** | Accessories |
| **Mechanical Design** | |
| **height** | 200 mm |
| **width of the adapter** | 76 mm |
| **depth** | 26 mm |
| **thickness of the busbar** | |
| ● minimum | 5 mm |
| **busbar center-to-center spacing** | 60 mm |
| **Net Weight** | 574 g |

**Approvals Certificates**

| Environment | | General Product Approval | | | |
|---|---|---|---|---|---|
| Environmental Confirmations | Environmental Confirmations | EAC | Confirmation | CE EG-Konf. | UKCA |


| Test Certificates | Maritime application | other | | |
|---|---|---|---|---|
| Miscellaneous | BUREAU VERITAS | Miscellaneous | Confirmation | 产品合格 QC PASS |

**Further information**

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1213-4AU01
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/8US1213-4AU01
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1213-4AU01
**CAx-Online-Generator**
https://www.siemens.com/cax


Subject to change without notice
© Copyright Siemens

**Tender specifications**
https://www.siemens.com/specifications
**Kennlinien**
https://curves.simaris.siemens.com/curves/8US1213-4AU01

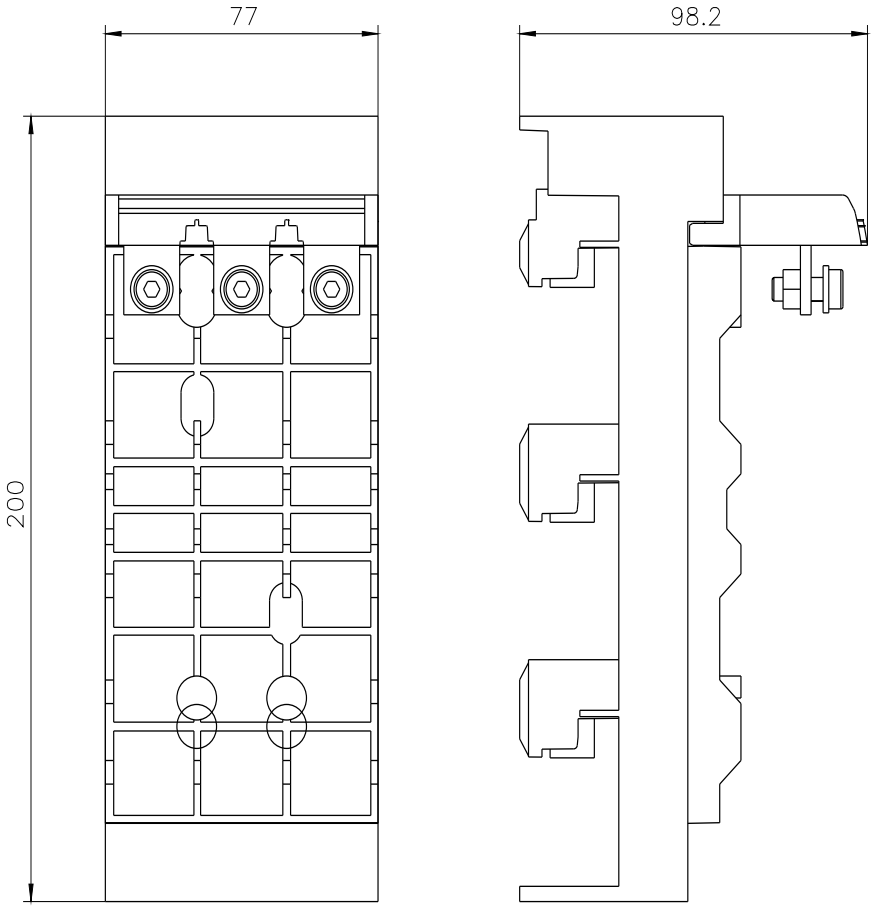


**last modified:** 4/11/2025


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens