SIEMENS

## Data sheet 3VA9988-0BL20




shunt trip left 380-600 V AC 50/60 Hz accessory for: 3VA1 and 3VA20-26

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | Auxiliary release |
| **accessories** | Auxiliary release |
| **General technical data** | |
| **degree of pollution** | 3 |
| **overvoltage category** | III |
| **apparent power consumption / maximum** | 40 VA |
| **Voltage** | |
| surge voltage resistance | 4 kV |
| **Mechanical Design** | |
| **height** | 65 mm |
| **width** | 25.7 mm |
| **number of slots** | 3 |
| **depth** | 31.2 mm |
| **net weight** | 91 g |
| **Net Weight** | 83 g |
| **tightening torque / with screw-type terminals / minimum** | 0.4 N·m |
| **tightening torque / with screw-type terminals / maximum** | 0.5 N·m |
| **Connections according IEC** | |
| **stripped length** | 10 mm |
| **connectable conductor cross-section** | |
| ● minimum | 0.5 ... 1.5 |
| ● maximum | |
| **AWG number / as coded connectable conductor cross section / for auxiliary contacts** | |
| ● minimum | 20 |
| ● maximum | 16 |
| **Connetctions according UL** | |
| **stripped length [in]** | 0.4 in |
| **tightening torque [lbf·in] / with screw-type terminals / minimum** | 3.5 lbf·in |
| **tightening torque [lbf·in] / with screw-type terminals / maximum** | 4.4 lbf·in |
| **Certificates** | |
| **General Product Approval** | **EMV** |


Subject to change without notice
© Copyright Siemens

Miscellaneous

Confirmation


| Test Certificates | Maritime application | other | | Environment | |
|---|---|---|---|---|---|
| Type Test Certific-ates/Test Report | | Miscellaneous | Confirmation | Environmental Con-firmations | Environmental Con-firmations |


**Environment**

## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL20
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL20
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL20
**CAx-Online-Generator**
https://www.siemens.com/cax
**Tender specifications**
https://www.siemens.com/specifications


Subject to change without notice
© Copyright Siemens

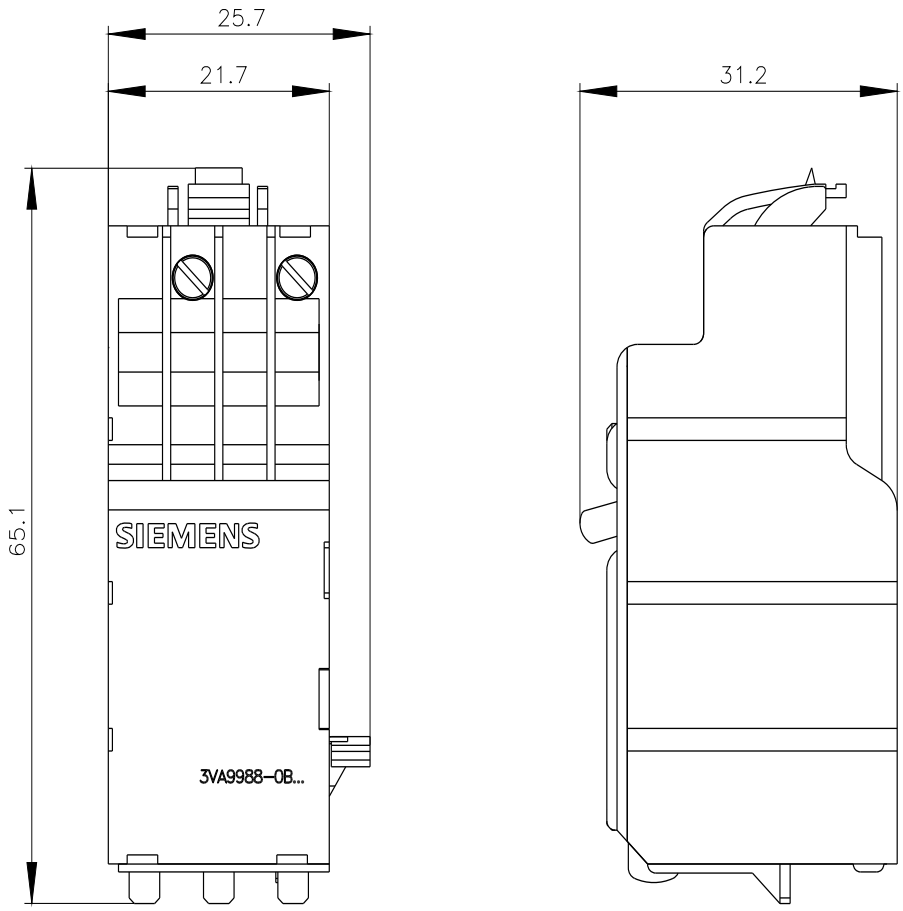

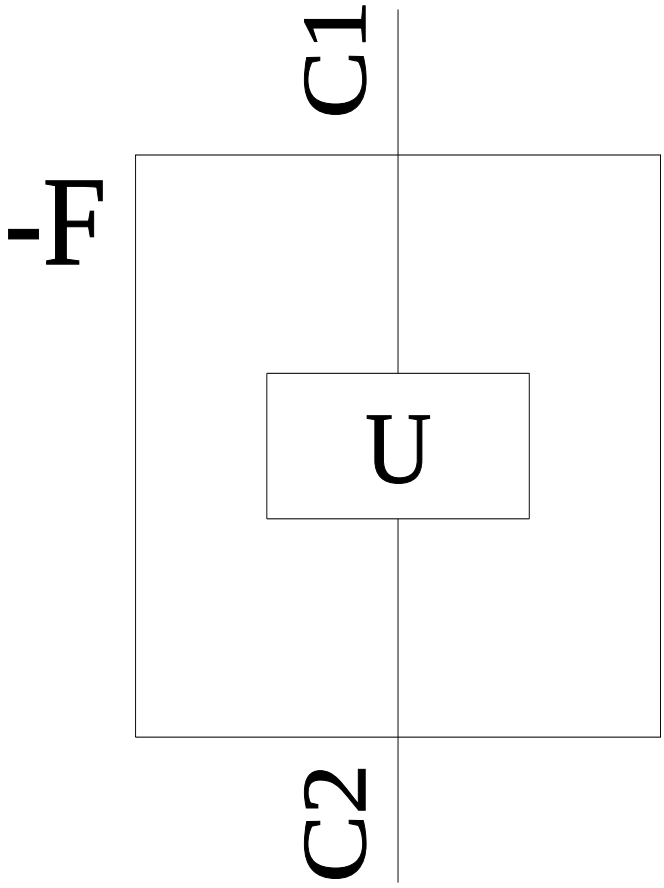
**last modified:** 5/29/2026


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens