
Product data sheet
Characteristics

TSXRKY12EX
Extendable rack, Modicon Premium, for multi racks configuration, 12 slots

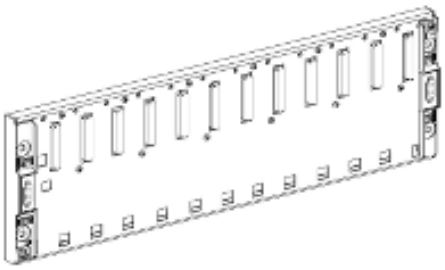

Commercial status
End of Commercialisation :

⚠ End of Commercialisation

Main

Range of product	Modicon Premium Automation platform
Product or component type	Extendable rack
Product specific application	For multi-racks configuration

Complementary

Number of slots	12
Product compatibility	TSXP57 processor I/O module Specific application module TSXPSY power supply
Electrical connection	2 connectors female SUB-D 9 (remote connection of bus X)
Fixing mode	By 4 M6 screws (panel) By clips (35 mm symmetrical DIN rail)
Marking	CE
Net weight	2.34 Kg

Environment

Standards	CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group D 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group B 93/68/EEC 89/336/EEC CSA C22.2 No 142 UL 508 CSA C22.2 No 213 Class I Division 2 Group C 73/23/EEC IEC 61131-2
Product certifications	ABS[RETURN]GL[RETURN]DNV[RETURN]LR[RETURN]BV[RETURN]RINA[RETURN]RMRS
Ambient air temperature for operation	0…60 °C
Ambient air temperature for storage	-25…70 °C
Relative humidity	10…95 % without condensation for operation 5…95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 Cm
Package 1 Width	21.0 Cm
Package 1 Length	57.0 Cm
Package 1 Weight	2.302 Kg

Offer Sustainability

Sustainable packaging	No

Contractual warranty

Warranty (in months)	18

Product Life Status : Post commercialisation

TSXRKY12EX may be replaced by any of the following products:



BMEXBP1200

rack, Modicon X80, 12 slots, Ethernet backplane

Qty 1

Substitution date: |